



(19) **United States**

(12) **Patent Application Publication**
Rojer

(10) **Pub. No.: US 2007/0256051 A1**

(43) **Pub. Date: Nov. 1, 2007**

(54) **PRODUCING UNITARY CLASS
DEFINITIONS FROM MODULE
SPECIFICATIONS**

Publication Classification

(51) **Int. Cl.**
G06F 9/44 (2006.01)
(52) **U.S. Cl.** 717/104

(76) Inventor: **Alan S. Rojer**, Maplewood, NJ
(US)

(57) **ABSTRACT**

Correspondence Address:
DIMELAB, LLC
BOX 336
MAPLEWOOD, NJ 07040-0336

A computer-implemented method of processing a module specification to produce elements of a module definition is disclosed. A module consists of a collection of interrelated classes for object-oriented programming. A module specification is an object-oriented data structure, the elements of which correspond to classes of a meta-module. A module definition is a collection of class definitions and other expressions in an object-oriented programming language. The module specification includes unitary and categorical class specifications. The class specifications include member specifications. The module definition may include definitions for a unitary host class, a unitary viewer class, a unitary editor class, a unitary factory class, a unitary reflector class, a unitary auditor class, acceptor class definitions, predicator class definitions, and categorical class definitions corresponding to the categorical class specifications.

(21) Appl. No.: **11/786,313**

(22) Filed: **Apr. 11, 2007**

Related U.S. Application Data

(60) Provisional application No. 60/791,128, filed on Apr. 11, 2006.

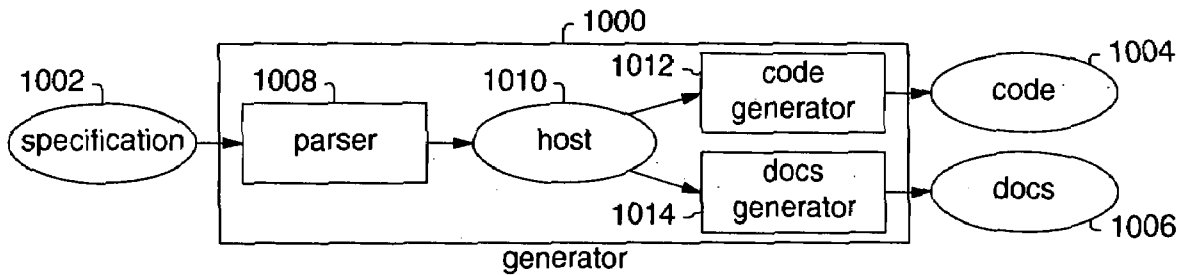


FIG. 1

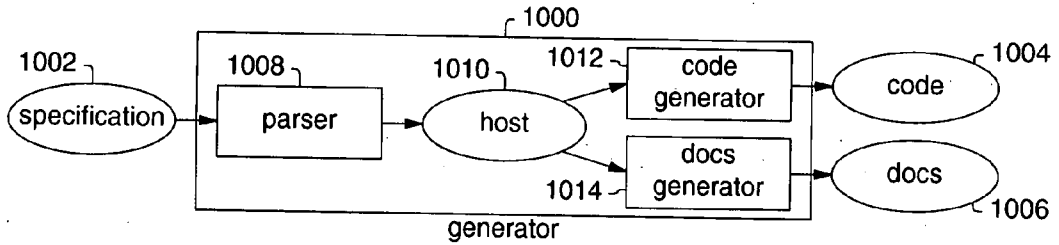


FIG. 2

```

dish1016 [ host dishHost1018 ] {
  Sequence<dishModule1028> modules1020 [meron];
  Sequence<dishType1054> types1022 [meron];
  dishElement1024 {
    dishEntity1026 {
      dishModule1028 {
        Sequence<dishClass1036> classes1030 [meron];
        Sequence<dishClass1036> forward_classes1032 [meron];
        dishHostClass1040 host1034 [meron];
      }
      dishClass1036 {
        Sequence<dishMember1046> members1038 [meron];
        dishHostClass1040 {}
      }
      dishOperand1042 {
        dishArgument1044 {}
        dishMember1046 {
          dishMemberFunction1048 {
            Sequence<dishArgument1044> arguments1050 [meron];
          }
          dishMemberDatum1052 {}
        }
      }
    }
  }
}
    
```

FIG. 3

```
dish1016:::dishElement1024 {
  dishType1054 {
    dishVoidType1056 {}
    dishValueType1058 {
      dishBitType1060 {}
      dishIntegerType1062 {}
      dishCardinalType1064 {}
      dishTextType1066 {}
    }
    dishReferenceType1068 {}
    dishCompoundType1070 {
      dishSequenceType1072 {
        dishValueSequenceType1074 {}
        dishReferenceSequenceType1076 {}
      }
      dishSetType1078 {
        dishValueSetType1080 {}
        dishReferenceSetType1082 {}
      }
      dishMapType1084 {
        dishIndexMapType1086 {}
        dishScaleMapType1088 {}
        dishBindMapType1090 {}
        dishConvertMapType1092 {}
      }
    }
  }
}
dish1016 { dimeLogger1094 } {}
```

FIG. 4

```
class dishHost1018 {
public: // features...
  Sequence<dishModule1028*> modules1020;
  dishModule1028* module1096(Text t);
  Map<Text, dishModule1028*> module_index1098;
  Boolean accept_module1100(dishModule1028* m);
  Sequence<dishType1054*> types1022;
  Boolean accept_type1102(dishType1054* arg_0);
};
```

FIG. 5

```
class dishElement1024 {  
public: // features...  
    Text source1104;  
};
```

FIG. 6

```
class dishEntity1026 : public dishElement1024 {  
public: // features...  
    Text id1106;  
    Text term1108;  
    Text title1110;  
    Text purpose1112;  
    Text passage1114;  
    Sequence<Text> remarks1116;  
    Sequence<Text> notes1118;  
};
```

FIG. 7

```

class dishModule1028 : public dishEntity1026 {
public: // features...
    Sequence<dishClass1036*> classes1030;
    Map<Text, dishClass1036*> class_index1120;
    Boolean accept_class1122(dishClass1036* c);
    dishClass1036* resolve_class1124(Text id);
    Boolean sort_classes1126(dimeLogger1094* arg_0);
    Sequence<dishClass1036*> forward_classes1032;
    Boolean accept_forward_class1128(dishClass1036* f);
    Sequence<dishClass1036*> root_classes1132;
    dishHostClass1040* host1034;
    Boolean accept_host1134(dishHostClass1040* h);
    Text viewer_id1136;
    Text editor_id1138;
    Text factory_id1140;
    Text factory_root_id1142;
    Text auditor_id1144;
    Text reflector_id1146;
    Text parser_id1148;
    Text resolver_id1150;
    Text resolver_root_id1154;
    Text resolver_id_field1152;
    Text acceptor_id1156;
    Text predicator_id1158;
    Text qualifier_id1160();
    Text singleton_id1162();
    Text plurality_id1164();
    Text predicator_sequence_id1166();
    Text promissary_reference_id1168();
    Text depository_id1170();
    Text predicator_host_id1172;
public: // cleanup...
    virtual ~dishModule1028() {
        /* cleanup classes1030 */
        /* cleanup forward_classes1032 */
        /* cleanup host1034 */
    }
};

```

FIG. 8

```

class dishClass1036 : public dishEntity1026 {
public: // features...
    dishModule1028* module1174;
    Sequence<dishClass1036*> genera1176;
    Sequence<dishMember1046*> members1038;
    Map<Text, dishMember1046*> member_index1178;
    Sequence<dishClass1036*> species1180;
    Sequence<dishClass1036*> genera_closure1182;
    Sequence<dishClass1036*> species_closure1184;
    Boolean is_module_root1186;
    Boolean constructs_markup_element1188;
    Boolean accepts_markup_element1190;
    Boolean accepts_markup_text1192;
    Boolean accepts_markup_predicate1194;
    Boolean markup_configure1196;
    Boolean markup_commit1198;
    Boolean is_pure_abstract1200;
    Boolean accept_member1202(dishMember1046* arg_0);
    Boolean provides_downcast1204;
    Sequence<Text> tags1206;
    Text acceptor_host_id1208();
    Sequence<Text> audit_requirements1210;
    Text auditor_context1214;
public: // cleanup...
    virtual ~dishClass1036() {
        /* cleanup members1038 */
    };
};

```

FIG. 9

```

class dishHostClass1040 : public dishClass1036 {};

```

FIG. 10

```

class dishOperand1042 : public dishEntity1026 {
public: // features...
    Text scope_handle1216;
    Boolean validate_handle1218(Text h);
    Boolean accept_scope_handle1220(Text h);
    Text scope_id1222;
    Boolean is_const1224;
    dishType1054* type1226;
};

```

FIG. 11

```
class dishArgument1044 : public dishOperand1042 {
public: // features...
    Cardinal position1228;
    Text arg_default1230;
};
```

FIG. 12

```
class dishMember1046 : public dishOperand1042 {
public: // features...
    dishClass1036* member_class1232;
};
```

FIG. 13

```
class dishMemberFunction1048 : public dishMember1046 {
public: // features...
    Boolean is_static1234;
    Boolean is_virtual1236;
    Boolean is_pure1238;
    Sequence<dishArgument1044*> arguments1050;
    Sequence<Text> inline_definition1240;
    Sequence<Text> definition1242;
    Text indicates1244;
public: // cleanup...
    virtual ~dishMemberFunction1048() {
        /* cleanup arguments1050 */ }
};
```

FIG. 14

```

class dishMemberDatum1052 : public dishMember1046 {
public: // features...
    Boolean is_meron1246;
    Boolean is_mutable1248;
    Text init1250;
    Text predicator_class_id1252 ();
    Text promissary_class_id1254 ();
    Text acceptor_class_id1256 ();
    Text generic_acceptor_id1258 ();
    dishMemberFunction1048* acceptor1260;
    Boolean inhibit_predicator1262;
    Sequence<Text> tags1264;
    Sequence<Text> handles1266;
    Boolean accept_handle1268(Text t);
};

```

FIG. 15

```

class dishType1054 : public dishElement1024 {
public: // features...
    Text type_text1270 ();
    Boolean is_plural1272 ();
};

```

FIG. 16

```

class dishVoidType1056 : public dishType1054 {
public: // features...
    Text type_text1274 ();
};

```


FIG. 17

```
class dishValueType1058 : public dishType1054 {};
```

FIG. 18

```
class dishBitType1060 : public dishValueType1058 {  
public: // features...  
    Text type_text1276();  
};
```

FIG. 19

```
class dishIntegerType1062 : public dishValueType1058 {  
public: // features...  
    Text type_text1278();  
};
```

FIG. 20

```
class dishCardinalType1064 : public dishValueType1058 {  
public: // features...  
    Text type_text1280();  
};
```

FIG. 21

```
class dishTextType1066 : public dishValueType1058 {  
public: // features...  
    Text type_text1282();  
};
```

FIG. 22

```
class dishReferenceType1068 : public dishType1054 {  
public: // features...  
    Text reference_class_id1284;  
    Text type_text1286();  
};
```

FIG. 23

```

class dishCompoundType1070 : public dishType1054 {
public: // features...
    Sequence<dishType1054*>.parameters1288;
    Text type_text1290();
    Text compound_text1292();
    Boolean is_plural1294();
    dishType1054* range1296;
};
    
```

FIG. 24

```

class dishSequenceType1072 : public dishCompoundType1070 {
public: // features...
    Text compound_text1298();
};
    
```

FIG. 25

```

class dishValueSequenceType1074 : public dishSequenceType1072 {
public: // features...
    dishValueType1058* value_range1300;
};
    
```

FIG. 26

```

class dishReferenceSequenceType1076 : public dishSequenceType1072 {
public: // features...
    dishReferenceType1068* reference_range1302;
};
    
```

FIG. 27

```
class dishSetType1078 : public dishCompoundType1070 {  
public: // features...  
    Text compound_text1304 ();  
};
```

FIG. 28

```
class dishValueType1080 : public dishSetType1078 {  
public: // features...  
    dishValueType1058* value_range1306;  
};
```

FIG. 29

```
class dishReferenceSetType1082 : public dishSetType1078 {  
public: // features...  
    dishReferenceType1068* reference_range1308;  
};
```

FIG. 30

```
class dishMapType1084 : public dishCompoundType1070 {
public: // features...
    dishType1054* domain1310;
    Text compound_text1312();
};
```

FIG. 31

```
class dishIndexMapType1086 : public dishMapType1084 {
public: // features...
    dishValueType1058* value_domain1314;
    dishReferenceType1068* reference_range1316;
};
```

FIG. 32

```
class dishScaleMapType1088 : public dishMapType1084 {
public: // features...
    dishReferenceType1068* reference_domain1318;
    dishValueType1058* value_range1320;
};
```

FIG. 33

```
class dishBindMapType1090 : public dishMapType1084 {
public: // features...
    dishReferenceType1068* reference_domain1322;
    dishReferenceType1068* reference_range1324;
};
```

FIG. 34

```
class dishConvertMapType1092 : public dishMapType1084 {
public: // features...
    dishValueType1058* value_domain1326;
    dishValueType1058* value_range1328;
};
```

FIG. 35

```
class dimeLogger1094 {};
```

FIG. 36

```

mscan1330 {
  mscanFile1332 {
    mscanDirectory1334 {
      mscanTopDirectory1336 {}
    }
    mscanRegularFile1338 {
      mscanAudioFile1340 {}
      mscanVideoFile1342 {}
    }
  }
}

```

FIG. 37

```

mscan1330 [
  host mscanHost1352;
  viewer mscanViewer1356;
  factory mscanFactory1358;
  factory-root mscanFile1332;
] {
  Set<mscanFile1332> _root_files1354 [meron];
  mscanFile1332 {
    mscanDirectory1334 _parent1344;
    Text _name1346;
    Text path1348() [virtual; const] ;
    mscanDirectory1334 {
      [tag 'folder']
      Set<mscanFile1332> _files1350 [meron];
      Bit accept1360(mscanFile1332);
      mscanTopDirectory1336 {
        Text path1362() [virtual; const] ;
      }
    }
  }
  mscanRegularFile1338 {
    mscanAudioFile1340 [tag 'mp3', 'wav', 'ogg'] {}
    mscanVideoFile1342 [tag 'mpg', 'mpeg', 'mov', 'avi', 'mp4'] {}
  }
}
}

```

FIG. 38

```

class mscanFile1332 {
private:
    // members...
    mscanDirectory1334* _parent1344;
    Text _name1346;
public:
    // view access to members...
    const mscanDirectory1334* parent() const {return _parent1344;}
    Text name() const {return _name1346;}
public:
    // edit access to members...
    mscanDirectory1334* parent() {return _parent1344;}
public:
    // reset access to members...
    void set_parent(mscanDirectory1334* s);
    void set_name(Text s) {_name1346 = s;}
public:
    // member acceptors...
    bool parent_accept(mscanDirectory1334* r) {set_parent(r); return 1;}
    bool name_accept(Text v) {set_name(v); return 1;}
public:
    // additional methods...
    virtual Text path1348() const;
public:
    // dispatch to viewer...
    virtual bool dispatch_view(mscanViewer1356&) const;
private:
    virtual const char *me() const {return "mscanFile";}
public:
    // factory...
    mscanFile();
    virtual ~mscanFile() {}
};

```

FIG. 39

```

bool
mscanFile1332::dispatch_view(mscanViewer1356 &v) const
{
    return v.view(this);
}

```

FIG. 40

```

typedef dimePointerSet<mscanFile1332> mscanFileSet;

class mscanHost1352 {
private:
    // members...
    mscanFileSet _root_files1354;
    mscanFactory1358 _factory;
    mutable dimeLogger *_logger;
public:
    // view access to members...
    const mscanFileSet& root_files() const {return _root_files1354;}
    const mscanFactory1358& factory() const {return _factory;}
    dimeLogger *logger() const {return _logger;}
public:
    // edit access to members...
    mscanFileSet& root_files() {return _root_files1354;}
    mscanFactory& factory() {return _factory;}
public:
    // reset access to members...
    void set_logger(dimeLogger *l) {_logger = l;}
public:
    // member acceptors...
    bool root_files_accept(mscanFile1332 *r) {_root_files.insert(r); return 1;}
public:
    // viewers for compound members...
    mscanFileSet::Viewer root_files_viewer() const;
public:
    // editors for compound members...
    mscanFileSet::Editor root_files_editor() ;
public:
    // factory...
    mscanHost(dimeLogger *l=0);
    virtual ~mscanHost();
private:
    // prohibited...
    mscanHost(const mscanHost&);
    mscanHost& operator=(const mscanHost&);
};

```

FIG. 41

```
class mscanViewer1356 {
public:
    // factory...
    mscanViewer() {}
    virtual ~mscanViewer() {}
private:
    // prohibited...
    mscanViewer(const mscanViewer1356&);
    mscanViewer& operator=(const mscanViewer1356&);
public:
    virtual bool view(const mscanFile1332*);
    virtual bool view(const mscanDirectory1334*);
    virtual bool view(const mscanTopDirectory1336*);
    virtual bool view(const mscanRegularFile1338*);
    virtual bool view(const mscanAudioFile1340*);
    virtual bool view(const mscanVideoFile1342*);
public:
    bool view_agg(const mscanFileSet&);
    bool view_agg(mscanFileSet::Viewer);
public:
    bool view_base(const mscanFile1332*);
    bool view_base(const mscanDirectory1334*);
    bool view_base(const mscanTopDirectory1336*);
    bool view_base(const mscanRegularFile1338*);
    bool view_base(const mscanAudioFile1340*);
    bool view_base(const mscanVideoFile1342*);
};
```


FIG. 42

```

bool
mscanViewer1356::view(const mscanFile1332* e)
{
    return view_base(e);
}

bool
mscanViewer1356::view_base(const mscanFile1332* e)
{
    return 1;
}

bool
mscanViewer1356::view_agg(const mscanFileSet &a)
{
    return view_agg(mscanFileSet::Viewer(a));
}

bool
mscanViewer1356::view_agg(mscanFileSet::Viewer ii)
{
    dime_foreach(const mscanFile1332*, e, ii)
        if (!e->dispatch_view(*this)) return 0;
    return 1;
}

bool
mscanViewer1356::view(const mscanDirectory1334* e)
{
    if (!view_agg(e->files())) return 0;
    return view_base(e);
}

bool
mscanViewer1356::view_base(const mscanDirectory1334* e)
{
    if (!e->mscanFile1332::dispatch_view(*this)) return 0;
    return 1;
}

// ...

```

FIG. 43

```

class mscanFactory1358 {
public:
    // instantiators...
    virtual mscanFile1332 *instantiate1364(dimeText);
public:
    // factory...
    mscanFactory1366();
    virtual ~mscanFactory() {}
private:
    // ctors...
    static mscanFile1332* mscanFile_ctor();
    static mscanFile1332* mscanDirectory_ctor();
    static mscanFile1332* mscanTopDirectory_ctor();
    static mscanFile1332* mscanRegularFile_ctor();
    static mscanFile1332* mscanAudioFile_ctor();
    static mscanFile1332* mscanVideoFile_ctor();
private:
    // members...
    typedef mscanFile1332* (Ctor)();
    typedef dimeIndex<dimeText, Ctor> CtorMap;
    CtorMap _ctor_map;
};

```

FIG. 44

```

class dimeFileWalker1374 {
    // ...
public:
    bool visit1376(dimeText path);
};

class mscanBuilder1368 : public dimeFileWalker {
public:
    mscanBuilder(mscanHost1352 &);
    virtual ~mscanBuilder();
public:
    mscanHost1352 &host() {return _host;}
    const mscanHost1352 &host() const {return _host;}
    // bool visit1376(dimeText path); // ...provided the base class
public:
    // responders for dimeFileWalker...
    virtual bool root_dir_open1378(dimeText, const struct stat*);
    virtual bool dir_open1382(dimeText, dimeText, const struct stat*);
    virtual bool regular_file1386(dimeText, dimeText, const struct stat*);
    virtual bool dir_close1384(dimeText, dimeText, const struct stat*);
    virtual bool root_dir_close1380(dimeText, const struct stat*);
private:
    mscanHost1352 &_host;
    pcre *_ext_regexp;
    typedef dimePointerSequence<mscanDirectory1334> Stack;
    Stack _stack;
};

```

FIG. 45

```

bool
mscanBuilder1368::root_dir_open1378(dimeText path,
    const struct stat *)
{
    mscanDirectory1334 *d = new mscanTopDirectory1336;
    d->set_name(path);
    if (_stack) return fail(path, "non-empty stack at root!?!");
    _host.accept(d);
    _stack.push(d);
    return 1;
}

bool
mscanBuilder1368::dir_open1382(dimeText dirpath, dimeText name,
    const struct stat *)
{
    mscanDirectory1334 *d = new mscanDirectory1334;
    d->set_name(name);
    if (!_stack)
        return fail(dirpath, name, "empty stack on non-root directory!?!");
    _stack.top()->accept(d);
    _stack.push(d);
    return 1;
}

bool
mscanBuilder1368::regular_file1386(dimeText dirpath, dimeText name,
    const struct stat *)
{
    dimeText ext;
    // ...PCRE processing to get ext from name omitted
    // ...cf. man 3 pcreapi, http://www.pcre.org/
    // try to get an mscanFile from the factory...
    mscanFile1332 *f = host().factory().instantiate(ext);
    if (f) {
        f->set_name(name);
        if (_stack) _stack.top()->accept(f);
        else return fail(dirpath, name, "empty stack on regular file!?!");
    }
    return 1;
}

```

FIG. 46

```

class mscanPage1388 {
public:
    mscanPage(dimeText dir_path, dimeLogger *l=0); // ...root page
    mscanPage(const mscanPageStack&, dimeText name, dimeText title,
        dimeLogger *l=0); // ...top-level page
    mscanPage(const mscanPageStack&, dimeText name, dimeLogger *l=0);
        // ...all other pages
    virtual ~mscanPage() {}
public:
    void accumulate(const mscanPage1388 &);
    void accumulate(const mscanVideoFile1342 *);
    void accumulate(const mscanAudioFile1340 *);
public:
    bool write();
private:
    bool fail(dimeText msg);
    void init(const mscanPageStack&);
    void init();
public:
    dimeText _dir_path, _name, _title;
    size_t _video_count, _closure_video_count;
    size_t _audio_count, _closure_audio_count;
    dimeTextSequence _parent_links, _child_links;
    dimeTextSequence _video_links, _audio_links;
};

```

FIG. 47

```

class mscanHtmlWriter1370 : public mscanViewer1356 {
public:
    mscanHtmlWriter(const mscanHost1352 &, dimeText target);
    virtual ~mscanHtmlWriter();
public:
    virtual bool view(const mscanTopDirectory1336 *);
    virtual bool view(const mscanDirectory1334 *);
    virtual bool view(const mscanVideoFile1342 *);
    virtual bool view(const mscanAudioFile1340 *);
public:
    bool failed() const {return _failed;}
    bool fail(dimeText msg);
    bool fail(const mscanFile *, dimeText msg);
private:
    bool require_dir(dimeText);
    typedef dimeConstPointerSequence<mscanFile> FileSequence;
    void sort_files(const mscanDirectory *, FileSequence&);
    bool view_agg(const FileSequence&);
    bool dir_page(const mscanDirectory1334 *, mscanPage1388 &);
private:
    const mscanHost1352& _host;
    dimeText _target;
    size_t _top_count;
    mscanPage1388* _index_page;
    typedef dimePointerSequence<mscanPage1388> Stack;
    Stack _stack;
    bool _failed;
};

```

FIG. 48

```

bool
mscanHtmlWriter1370::dir_page(const mscanDirectory1334 *d, mscanPage1388 &dp)
{
    bool ok = 1;
    if (!_stack) return fail(d, "empty stack!?!");
    if (!require_dir(dp.dir_path())) return fail(d, "couldn't create directory");
    { // visit constituents recursively...
        _stack.push(&dp);
        FileSequence s; sort_files(d, s);
        if (!view_agg(s)) ok = 0;
        _stack.pop();
    }
    if (!dp.write()) return fail(d, "write failed");
    _stack.top()->accumulate(dp);
    return ok;
}

bool
mscanHtmlWriter1370::view(const mscanTopDirectory1336 *d)
{
    dimePrintf name("topdir-%02u", _top_count++);
    mscanPage1388 dp(_stack, name, d->name(), logger());
    if (!dir_page(d, dp)) return fail(d, "dir-page failed");
    return 1;
}

bool
mscanHtmlWriter1370::view(const mscanDirectory1334 *d)
{
    mscanPage1388 dp(_stack, d->name(), logger());
    if (!dir_page(d, dp)) return fail(d, "dir-page failed");
    return 1;
}

bool
mscanHtmlWriter1370::view_agg(const FileSequence &s)
{
    FileSequence::Viewer ii(s);
    dime_foreach(const mscanFile1332 *, f, ii) {
        if (!f->dispatch_view(*this)) return 0;
    }
    return 1;
}

```

FIG. 49

```

bool
mscanHtmlWriter1370::view(const mscanVideoFile1342 *f)
{
    if (!_stack) return fail(f, "empty stack!?!");
    _stack.top()->accumulate(f);
    return 1;
}

bool
mscanHtmlWriter1370::view(const mscanAudioFile1340 *f)
{
    if (!_stack) return fail(f, "empty stack!?!");
    _stack.top()->accumulate(f);
    return 1;
}

```

FIG. 50

```

int main1372(int argc, char **argv) {
    const char *me = "mscan-writer";
    dimePrintf usage("usage: %s path [path...] target", me);
    // ...argument verification omitted for brevity
    dimeText target(argv[--argc]);
    int arg = 1;
    bool failed = 0;
    dimeStreamLogger logger(cerr);
    mscanHost1352 host(&logger);
    mscanBuilder1368 builder(host);
    while (arg < argc) {
        const char *path = argv[arg++];
        dimeLoggerContext path_context(&logger, path);
        if (!builder.visit1376(path)) failed = 1;
    }
    if (!failed) {
        // write some html...
        mscanHtmlWriter1370 writer(host, target);
        if (writer.failed()) {
            logger.fail("writer failed");
            failed = 1;
        }
    }
    return !failed ? 0 : -1;
}

```


FIG. 51

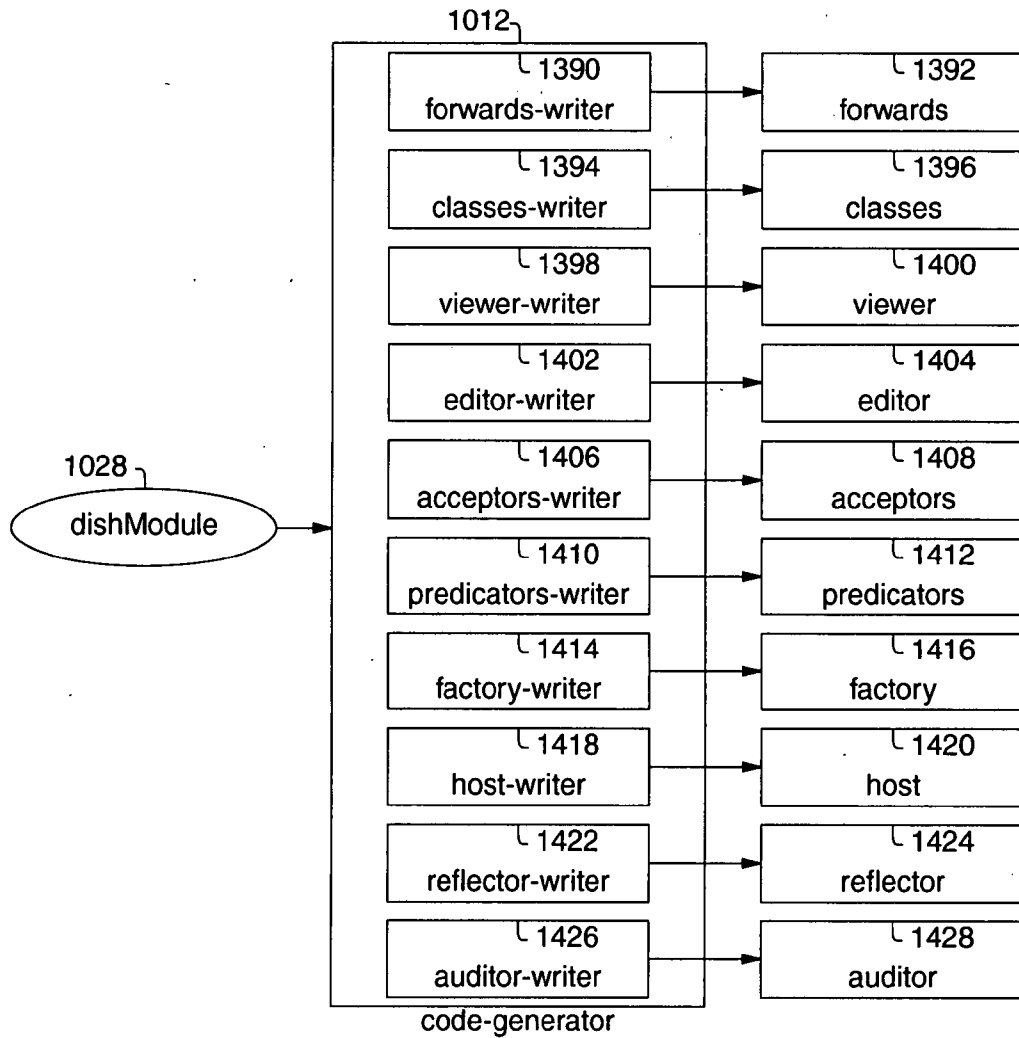


FIG. 52

```

// includes1430...
#include "dimeSet.h"
#include "dimeText.h"

// forwards1392...
class mscanFile1332;
    class mscanDirectory1334;
        class mscanTopDirectory1336;
    class mscanRegularFile1338;
        class mscanAudioFile1340;
        class mscanVideoFile1342;

// module-services1432...
class mscanHost1352;
class mscanViewer1356;
class mscanFactory1358;

// typedefs1434...
typedef dimePointerSet<mscanFile1332> mscanFileSet;

```

FIG. 53

```

// class definition from class-definitions1396...
class mscanDirectory1334 : public mscanFile1332 {
private:
    // member-datum-definitions1438...
    mscanFileSet _files1350;
public:
    // view-member-access1440...
    const mscanFileSet& files() const {return _files1350;}
public:
    // edit-member-access1442...
    mscanFileSet& files() {return _files1350;}
public:
    // uniform-member-acceptors1446...
    bool files_accept(mscanFile *r) {_files1350.insert(r); return 1;}
public:
    // compound-member-viewers1448...
    mscanFileSet::Viewer files_viewer() const {
        return mscanFileSet::Viewer(_files);
    }
public:
    // compound-member-editors1450...
    mscanFileSet::Editor files_editor() {
        return mscanFileSet::Editor(_files);
    }
public:
    // specified-member-functions1452...
    dimeBit accept(mscanFile*);
public:
    // viewer-dispatch1454...
    virtual bool dispatch_view(mscanViewer&) const;
public:
    // reflector-interface1456...
    static dimeText static_class_id();
    virtual dimeText class_id() const {return static_class_id();}
public:
    // factory1458...
    mscanDirectory() {}
    virtual ~mscanDirectory();
};

```

FIG. 54

```

// viewer1400...
class mscanViewer1356 {
public:
    // factory...
    mscanViewer() {}
    virtual ~mscanViewer() {}
public:
    // view-members1460 declarations...
    virtual bool view(const mscanFile1332*);
    virtual bool view(const mscanDirectory1334*);
    virtual bool view(const mscanTopDirectory1336*);
    virtual bool view(const mscanRegularFile1338*);
    virtual bool view(const mscanAudioFile1340*);
    virtual bool view(const mscanVideoFile1342*);
public:
    // view-agg-members1464 declarations...
    bool view_agg(const mscanFileSet&);
    bool view_agg(mscanFileSet::Viewer);
public:
    // view-base-members1462 declarations...
    bool view_base(const mscanFile1332*);
    bool view_base(const mscanDirectory1334*);
    bool view_base(const mscanTopDirectory1336*);
    bool view_base(const mscanRegularFile1338*);
    bool view_base(const mscanAudioFile1340*);
    bool view_base(const mscanVideoFile1342*);
};

```

FIG. 55

```

// view-members1460 definitions...
bool
mscanViewer1356::view(const mscanFile1332* e)
{
    return view_base(e);
}

bool
mscanViewer1356::view(const mscanDirectory1334* e)
{
    if (!view_agg(e->files())) return 0;
    return view_base(e);
}

// view-base-members1462 definitions...
bool
mscanViewer1356::view_base(const mscanFile1332* e)
{
    return 1;
}

bool
mscanViewer1356::view_base(const mscanDirectory1334* e)
{
    if (!e->mscanFile1332::dispatch_view(*this)) return 0;
    return 1;
}

// view-agg-members1464 definitions...
bool
mscanViewer1356::view_agg(const mscanFileSet &a)
{
    return view_agg(mscanFileSet::Viewer(a));
}

bool
mscanViewer1356::view_agg(mscanFileSet::Viewer ii)
{
    dime_foreach(const mscanFile1332*, e, ii)
        if (!e->dispatch_view(*this)) return 0;
    return 1;
}

```

FIG. 56

```
dr4s1472 [acceptor-id dr4sAcceptor1474] {  
  dr4sElement1476 {  
    dr4sItem1478 [tag item] {}  
    dr4sChannel1480 [tag channel] {  
      Sequence<dr4sItem1478> _items1482 [meron; tag 'item'];  
    }  
  }  
}
```

FIG. 57

```
// base-acceptor1466 definition...  
class dr4sAcceptor1474 {  
public:  
  virtual bool accept(dr4sElement1476 *);  
  virtual bool accept(dr4sItem1478 *);  
  virtual bool accept(dr4sChannel1480 *);  
};
```

FIG. 58

```

// base-acceptor1466 methods...
bool
dr4sAcceptor1474::accept(dr4sElement1476 *e)
{
    return 0;
}

bool
dr4sAcceptor1474::accept(dr4sItem1478 *e)
{
    if (accept((dr4sElement1476*) e)) return 1;
    return 0;
}

bool
dr4sAcceptor1474::accept(dr4sChannel1480 *e)
{
    if (accept((dr4sElement1476*) e)) return 1;
    return 0;
}

```

FIG. 59

```

// specialized-acceptors1468 definition...
class dr4sChannel_itemsAcceptor1484 : public dr4sAcceptor1474 {
public:
    dr4sChannel_itemsAcceptor(dr4sChannel1480 *t) : _target(t) {}
public:
    bool accept(dr4sItem1478*) {return _target->items_accept(c);}
private:
    dr4sChannel1480* _target;
};

```

FIG. 60

```

// acceptor-hosts1470 definition...
class dr4sChannelAcceptorHost1486 {
public:
    dr4sChannelAcceptorHost();
    dr4sAcceptor1474* acceptor1490(dr4sChannel1480* target, dimeText tag);
    dr4sElement1476* instantiate1488(dimeText tag);
private:
    // acceptor instantiators (Ator)....
    static dr4sAcceptor1474* dr4sChannel_itemsAcceptor_ator(dr4sChannel1480* t) {
        return new dr4sChannel_itemsAcceptor1484(t);
    }
    // context-instantiators (Itor)....
    static dr4sElement1476* dr4sChannel_itemsAcceptor_itor() {
        return new dr4sItem1478;
    }
private:
    typedef dr4sAcceptor1474* (Ator)(dr4sChannel1480*);
    typedef dimeIndex<dimeText, Ator> AtorMap;
    AtorMap _ator_map;
    typedef dr4sElement1476* (Itor)();
    typedef dimeIndex<dimeText, Itor> ItorMap;
    ItorMap _itor_map;
};

```

FIG. 61

```

// acceptor-hosts1470 definition...
dr4sChannelAcceptorHost1486::dr4sChannelAcceptorHost() {
    _ator_map["item"] = &dr4sChannel_itemsAcceptor_ator;
    _itor_map["item"] = &dr4sChannel_itemsAcceptor_itor;
}

dr4sAcceptor1474*
dr4sChannelAcceptorHost1486::acceptor1490(dr4sChannel1480* target, dimeText tag) {
    Ator *ator = _ator_map(tag);
    return ator ? (*ator)(target) : 0;
}

dr4sElement1476*
dr4sChannelAcceptorHost1486::instantiate1488(dimeText tag) {
    Itor *itor = _itor_map(tag);
    return itor ? (*itor)() : 0;
}

```


FIG. 62

```

class dr4sElement {
public: // markup responders...
    // ...
    virtual bool accept_element(dimeText, dr4sElement*, dr4sHost&);
    // ...
public:
    // dispatch to acceptor...
    virtual bool dispatch_acceptor(dr4sAcceptor&);
    virtual dr4sAcceptor* request_acceptor(dr4sFactory&, dimeText);
    // ...
};

class dr4sChannel : public dr4sElement {
private:
    // members...
    dr4sItemSequence _items;
    // ...
public:
    // member acceptors...
    bool items_accept(dr4sItem *r) {_items.push_back(r); return 1;}
public:
    // dispatch to acceptor...
    virtual bool dispatch_acceptor(dr4sAcceptor &a) {return a.accept(this);}
    virtual dr4sAcceptor* request_acceptor(dr4sFactory1542 &f, dimeText tag) {
        return f.request_acceptor(this, tag);
    }
    virtual dr4sElement* request_instantiation(dr4sFactory1542 &f, dimeText tag) {
        return f.request_instantiation(this, tag);
    }
    // ...
};

```

FIG. 63

```
bool
dr4sElement::accept_element(dimeText t, dr4sElement *e, dr4sHost &h)
{
    dr4sAcceptor1474 *a = request_acceptor(h.factory(), t);
    if (a) {
        if (!e->dispatch_acceptor(*a)) {
            h.logger()->warn("%s: %s: declined", class_id().s(), t.s());
            delete e;
        }
        delete a;
    }
    else {
        h.logger()->warn("%s: %s: no acceptor", class_id().s(), t.s());
        delete e;
    }
    return 1;
}
```

FIG. 64

```

// predator definitions1412...

// predator base class definitions1492...
class dishPredicator1508 {
public:
    // generic predator apply operations1494...
    virtual bool apply(dishModule1028 *, dishHost1018 &) const;
    virtual bool apply(dishClass1036 *, dishHost1018 &) const;
    virtual bool apply(dishMemberDatum1052 *, dishHost &) const;
    // ...
private:
    dimeText _tag;
};

class dishPredicatorQualifier1510 : public dishPredicator1508 {};

class dishPredicatorSingleton1512 : public dishPredicator1508 {
    // ...
private:
    dimeText _complement;
};

class dishPredicatorPlurality1514 : public dishPredicator1508 {
    // ...
private:
    dimeTextSequence _complements;
};

```

FIG. 65

```

// predator definitions1412...
// predator specializations1496...
// example of value predator specialization1518...
class dish_accepts_markup_elementQualifier1516
    : public dishPredicatorQualifier1510 {
public:
    // example of specific predator apply operations1498...
    // example of value specific predator apply operation1520...
    bool apply(dishClass1036 *e, dishHost &) const {
        return e->accepts_markup_element_accept(1);
    }
};

// example of instantiating predator specialization1524...
class dish_hostSingleton1522 : public dishPredicatorSingleton1512 {
public:
    // example of specific predator apply operations1498...
    // example of instantiating specific predator apply operation1526...
    bool apply(dishModule1028 *e, dishHost1018 &) const {
        dishHostClass1040 *m = new dishHostClass1040;
        m->id_accept(_complement);
        return e->host_accept(m);
    }
};

```

FIG. 66

```

// predator definitions1412...
// promissary reference base class definition1500...
class dishPredicatorPromissaryReference1528 {
public:
    dishPredicatorPromissaryReference(dimeText t, dimeText id, dimeText s)
        : _tag(t), _id(id), _source(s) {}
    // ...
    // promissary resolve operation1530...
    bool resolve(dishHost1018 &c, dimeLogger *) const {
        dishEntity1026 *e = c.resolver().resolve(_id);
        if (!e) return 0;
        return e->dispatch_resolution(*this, c);
    }
    // generic promissary acceptor operations1502...
    // ...
    virtual bool accept(dishMemberDatum *, dishHost &) const;
private:
    dimeText _tag, _id, _source;
};

```

FIG. 67

```

// predator definitions1412...
class dishMemberDatum1052 : public dishMember {
private:
    dishMemberFunction1048* acceptor1260;
public:
    bool acceptor_accept(dishMemberFunction1048* r) {acceptor1260=r; return 1;}
};

class dishMemberFunction1048 : public dishMember {
public:
    // promissary dispatch1532...
    virtual bool dispatch_resolution(
        const dishPredicatorPromissaryReference &pr, dishHost &c)
    {
        return pr.accept(this, c);
    }
    // ...
};

// example of promissary reference definition1504...
class dishMemberDatum_acceptorPromissaryReference1534
    : public dishPredicatorPromissaryReference1528
{
public:
    dishMemberDatum_acceptorPromissaryReference(dishMemberDatum* t,
        dimeText tag, dimeText id, dimeText source)
        : dishPredicatorPromissaryReference(tag, id, source), _target(t) {}
    // example of specific promissary acceptor operations1506...
    bool accept(dishMemberFunction1048*m, dishHost&) const {
        _target->acceptor_accept(m);
    }
private:
    dishMemberDatum* _target;
};

// example of predator specializations1496...
// example of promissary predator specialization1538...
class dish_acceptorSingleton : public dishPredicatorSingleton {
public:
    // example of specific predator apply operations1498...
    // example of promissary specific predator apply operation1540...
    bool apply(dishMemberDatum *e, dishHost &c) const {
        c.depository() << new dishMemberDatum_acceptorPromissaryReference1534(
            e, tag(), complement(), source());
    }
    return 1;
};

```

FIG. 68

```

// factory1416...
class dr4sFactory1542 {
public:
    dr4sFactory();
public:
    // instantiators1544...
    virtual dr4sElement1476 *instantiate(dimeText);
    virtual dr4sElement1476 *instantiate(dr4sElement*, dimeText);
public:
    // acceptor-responders1546...
    dr4sAcceptor1474* request_acceptor(dr4sElement1476*, dimeText);
    dr4sAcceptor1474* request_acceptor(dr4sItem1478*, dimeText);
    dr4sAcceptor1474* request_acceptor(dr4sChannel1480*, dimeText);
    // ...
public:
    // context-instantiator-responders1548...
    dr4sElement1476* request_instantiation(dr4sElement1476*, dimeText);
    dr4sElement1476* request_instantiation(dr4sItem1478*, dimeText tag) {
        return _dr4sItemAcceptorHost.instantiate(tag);
    }
    dr4sElement1476* request_instantiation(dr4sChannel1480*, dimeText tag) {
        return _dr4sChannelAcceptorHost.instantiate(tag);
    }
    // ...
private:
    // acceptor-host-members1550...
    dr4sElementAcceptorHost _dr4sElementAcceptorHost;
    dr4sItemAcceptorHost _dr4sItemAcceptorHost;
    dr4sChannelAcceptorHost1486 _dr4sChannelAcceptorHost;
    // ...
private:
    // static-instantiators1552...
    static dr4sElement1476* dr4sElement_ctor();
    static dr4sElement1476* dr4sItem_ctor() {return new dr4sItem1478;}
    static dr4sElement1476* dr4sChannel_ctor() {return new dr4sChannel1480;}
    // ...
private:
    // instantiator-map-member1554...
    typedef dr4sElement1476* (Ctor)();
    typedef dimeIndex<dimeText, Ctor> CtorMap;
    CtorMap _ctor_map;
};

```

FIG. 69

```

dr4sFactory1542::dr4sFactory()
{
    // instantiator-map-initializers1556...
    _ctor_map["item"] = &dr4sItem_ctor;
    _ctor_map["channel"] = &dr4sChannel_ctor;
}

// instantiators1544 definitions...
dr4sElement1476*
dr4sFactory1542::instantiate(dimeText t)
{
    Ctor *ctor = _ctor_map(t);
    return ctor ? (*ctor)() : 0;
}

dr4sElement1476*
dr4sFactory1542::instantiate(dr4sElement1476 *e, dimeText t)
{
    return e->request_instantiation(*this, t);
}

```

FIG. 70

```

// resolver1558...
class dishResolver1562 : public dishEditor1564 {
public:
    // build the index...
    bool edit(dishEntity1026 *e) {
        if (!e->id()) return 0;
        if (!_index.insert(e->id(), e)) return 0;
        return 1;
    }
public:
    // operate the index...
    dishEntity1026* resolve(dimeText t) {return _index(t);}
    const dishEntity1026* resolve(dimeText t) const {return _index(t);}
private:
    typedef dimeIndex<dimeText, dishEntity1026> Index;
    Index _index;
};

// depository1560...
class dishPredicatorDepository1566 {
public:
    // accept promissary reference...
    typedef dishPredicatorPromissaryReference Reference;
    void operator<<(Reference *r) {_references << r;}
public:
    // redeem promissary references...
    bool redeem(dishHost1018 &context, dimeLogger *logger) {
        bool ok = 1;
        while (_references) {
            Reference *r = _references.pop();
            if (!r->resolve(context, logger)) ok = 0;
            delete r;
        }
        return ok;
    }
private:
    // member...
    dimePointerSequence<Reference> _references;
};

```


FIG. 71

```

// host1420...
class dishHost1018 {
private:
    // client-member-data1568...
    dishModuleSequence _modules1020;
    dishModule_dimeTextMap _module_index1098;
    dishTypeSequence _types1022;
public:
    // client-member-functions1570...
    // additional methods...
    dishModule* module(dimeText t);
    dimeBit accept_module(dishModule* m);
    dimeBit accept_type(dishType*);
private:
    // module-member-data1572...
    dishResolver1562 _resolver;
    dishPredicatorDepository1566 _depository;
    dishFactory _factory;
    dishReflector1578 _reflector;
    mutable dimeLogger *_logger;
public:
    // member-access1574...
    const dishModuleSequence& modules() const {return _modules;}
    const dishModule_dimeTextMap& module_index() const {return _module_index;}
    const dishTypeSequence& types() const {return _types;}
    const dishResolver& resolver() const {return _resolver;}
    // ...
public:
    // factory1576...
    dishHost(dimeLogger *l=0);
    virtual ~dishHost();
};

```

FIG. 72

```

// reflector1424...
class dishReflector1578 {
public:
    // factory-services1580...
    dishReflector();
    virtual ~dishReflector();
public:
    // id-services1582...
    dimeText canonical_class_id(dimeText) const;
    bool validate(dimeText) const;
public:
    // set-services1584...
    const dimeTextSet &empty_set() const {return _empty_set;};
    const dimeTextSet &species_set(dimeText) const;
    const dimeTextSet &genera_set(dimeText) const;
    const dimeTextSet &species_closure_set(dimeText) const;
    const dimeTextSet &genera_closure_set(dimeText) const;
    const dimeTextSet &universal_set() const {return _universal_set;};
public:
    // sequence-services1586...
    const dimeTextSequence &empty_sequence() const {return _empty_sequence;};
    const dimeTextSequence &species_sequence(dimeText) const;
    const dimeTextSequence &genera_sequence(dimeText) const;
    const dimeTextSequence &species_closure_sequence(dimeText) const;
    const dimeTextSequence &genera_closure_sequence(dimeText) const;
    const dimeTextSequence &universal_sequence() const {return _universal_sequence;};
private:
    // member-data1588...
    const dimeTextSet _empty_set;
    const dimeTextSequence _empty_sequence;
    typedef dimeMap<dimeText, dimeText> TextMap;
    TextMap _canonical_class_id;
    typedef dimeIndex<dimeText, dimeTextSet> SetIndex;
    SetIndex _species_set, _genera_set;
    SetIndex _species_closure_set, _genera_closure_set;
    typedef dimeIndex<dimeText, dimeTextSequence> SequenceIndex;
    SequenceIndex _species_sequence, _genera_sequence;
    SequenceIndex _species_closure_sequence, _genera_closure_sequence;
    dimeTextSet _universal_set;
    dimeTextSequence _universal_sequence;
};

```

FIG. 73

```

// factory-services1580 excerpts...
dishReflector1578::dishReflector() {
  { // genera...
    { // dishElement1024...
      dimeTextSet *gs = new dimeTextSet;
      _genera_set[dishElement1024::static_class_id()] = gs;
      dimeTextSet *gsc = new dimeTextSet;
      _genera_closure_set[dishElement1024::static_class_id()] = gsc;
      dimeTextSequence *g = new dimeTextSequence;
      _genera_sequence[dishElement1024::static_class_id()] = g;
      dimeTextSequence *gc = new dimeTextSequence;
      _genera_closure_sequence[dishElement1024::static_class_id()] = gc;
      (*gsc) += (*gs);
    }
    { // dishEntity1026...
      dimeTextSet *gs = new dimeTextSet;
      _genera_set[dishEntity1026::static_class_id()] = gs;
      dimeTextSet *gsc = new dimeTextSet;
      _genera_closure_set[dishEntity1026::static_class_id()] = gsc;
      dimeTextSequence *g = new dimeTextSequence;
      _genera_sequence[dishEntity1026::static_class_id()] = g;
      dimeTextSequence *gc = new dimeTextSequence;
      _genera_closure_sequence[dishEntity1026::static_class_id()] = gc;
      gs->put(dishElement1024::static_class_id());
      (*gsc) += genera_closure_set(dishElement1024::static_class_id());
      (*g) << dishElement1024::static_class_id();
      (*gc) << dishElement1024::static_class_id();
      (*gc) << genera_closure_sequence(dishElement1024::static_class_id());
      (*gsc) += (*gs);
    }
  }
  // ...
}
}

```

FIG. 74

```

// factory-services1580 excerpts...
dishReflector1578::dishReflector() {
  { // species...
    // ...
    { // dishEntity1026...
      dimeTextSet *ss = new dimeTextSet;
      _species_set[dishEntity1026::static_class_id()] = ss;
      dimeTextSet *ssc = new dimeTextSet;
      _species_closure_set[dishEntity1026::static_class_id()] = ssc;
      dimeTextSequence *s = new dimeTextSequence;
      _species_sequence[dishEntity1026::static_class_id()] = s;
      dimeTextSequence *sc = new dimeTextSequence;
      _species_closure_sequence[dishEntity1026::static_class_id()] = sc;
      ss->put(dishModule1028::static_class_id());
      (*ssc) += species_closure_set(dishModule1028::static_class_id());
      (*s) << dishModule1028::static_class_id();
      (*sc) << dishModule1028::static_class_id();
      (*sc) << species_closure_sequence(dishModule1028::static_class_id());
      ss->put(dishClass1036::static_class_id());
      (*ssc) += species_closure_set(dishClass1036::static_class_id());
      (*s) << dishClass1036::static_class_id();
      (*sc) << dishClass1036::static_class_id();
      (*sc) << species_closure_sequence(dishClass1036::static_class_id());
      // ...
    }
  }
  { // dishElement1024...
    dimeTextSet *ss = new dimeTextSet;
    _species_set[dishElement1024::static_class_id()] = ss;
    dimeTextSet *ssc = new dimeTextSet;
    _species_closure_set[dishElement1024::static_class_id()] = ssc;
    dimeTextSequence *s = new dimeTextSequence;
    _species_sequence[dishElement1024::static_class_id()] = s;
    dimeTextSequence *sc = new dimeTextSequence;
    _species_closure_sequence[dishElement1024::static_class_id()] = sc;
    ss->put(dishEntity1026::static_class_id());
    (*ssc) += species_closure_set(dishEntity1026::static_class_id());
    (*s) << dishEntity1026::static_class_id();
    (*sc) << dishEntity1026::static_class_id();
    (*sc) << species_closure_sequence(dishEntity1026::static_class_id());
    // ...
  }
}
}
}

```

FIG. 75


```

// auditor1428...
class dishAuditor1590 : public dishViewer1592 {
public:
    dishAuditor(dimeLogger *l) : _logger(l) {}
    virtual ~dishAuditor() {}
public:
    // logging-context1594...
    dimeText context(const dishElement *e);
public:
    // views1596...
    virtual bool view(const dishEntity *e) {
        {
            dimeLoggerContext lc(_logger, context(e));
            if (!e->audit(_logger)) return 0;
        }
        return dishViewer1592::view(e);
    }
    virtual bool view(const dishClass *);
    virtual bool view(const dishMember *);
private:
    mutable dimeLogger *_logger;
};

class dishEntity1026 : public dishElement1024 {
private:
    // members...
    dimeText _id;
    // ...
public:
    // audits1598...
    bool audit(dimeLogger *logger) const {
        if (!_id) {
            logger->fail("'_id' failed");
            return 0;
        }
        return 1;
    }
    // ...
};

```

FIG. 76

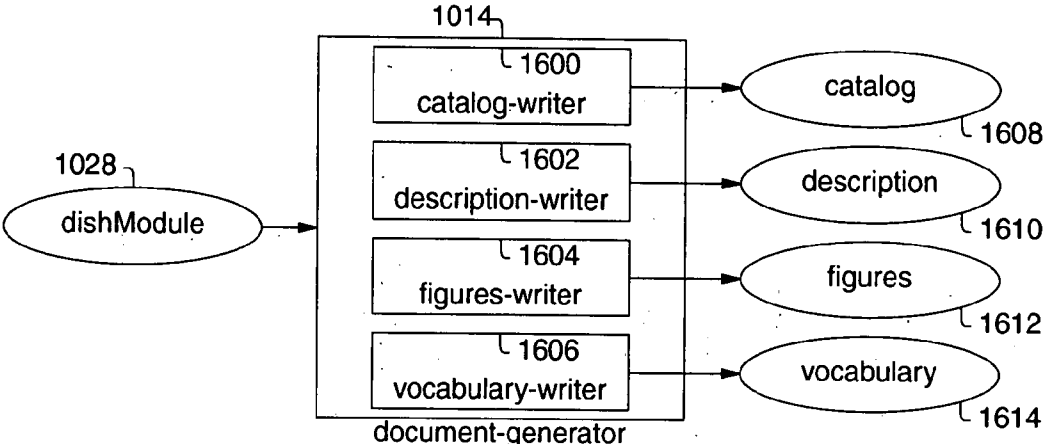

**PRODUCING UNITARY CLASS
DEFINITIONS FROM MODULE
SPECIFICATIONS**

CROSS-REFERENCE TO RELATED
APPLICATIONS:

[0001] This application claims the benefit of PPA Ser. No. 60/791,128, Module Generation for Object-Oriented Programming, Atty. Docket #2006-003, filed Apr. 11, 2006 by the present inventor, the disclosure of which is incorporated herein by reference.

BACKGROUND OF THE INVENTION

[0002] This invention relates particularly to the production of module definitions from module specifications, and generally to software development tools generating object-oriented programming language code.

[0003] Object-oriented programming enjoys great popularity among programmers. However, in the development of a complex system, the programmer must attend to a vast collection of details. These details may easily obscure and complicate large-scale considerations of the interactions within and between program elements. Hence it would be beneficial to have the use of tools which reduce complexity by automatically handling various details, which may then be suppressed in favor of concise expressions of large-scale interactions.

[0004] Object-oriented programming tends to focus on classes, since classes are the most important component in object-oriented programming languages. In many applications, however, significant benefits may be gained by considering modules, which include collections of interrelated classes. Modules typically incorporate classes which are closely related to domain-specific categories. Relationships of generalizations and specialization among domain categories may be reflected in derivation relationships between categorical classes. It would be beneficial for modules to also include non-categorical classes which are specialized for hosting and processing data structures composed of instances from the categorical classes. It would also be beneficial to coordinate and systematize categorical and unitary non-categorical classes to enhance developer productivity, further relieving the developer from excessive attention to tedious details.

[0005] The problems of specifying suitable representations have led to enormous efforts in the provision of modeling languages, of which the most prominent may be the Unified Modeling Language. (UML). UML is vast and comprehensive, with a scope that encompasses all aspects of object-oriented programming. The breadth of that scope limits the use of idioms, patterns, and other paradigms that are applicable in a narrower context of specific unitary and categorical classes. It would be beneficial to have methods of processing that were specifically directed to the narrower but still critical problems of the specification, construction, and processing of domain-specific object-oriented data structures.

SUMMARY

[0006] A computer-implemented method of processing a module specification to produce predicator definitions is disclosed.

[0007] A module is viewed. The module is included in the module specification. A predicator base class definition is provided. The predicator base class definition is included in the predicator definitions. The predicator base class definition includes a plurality of generic predicator apply operations. A promissary reference base class definition is provided. The promissary reference base class definition is included in the predicate definitions. The promissary reference base class definition includes a resolve operation. The promissary reference base class definition includes a plurality of generic promissary acceptor operations.

[0008] A plurality of categorical classes are dispatched. The categorical classes are included in the module. A categorical class is viewed. The categorical class is included in the categorical classes. A generic predicator apply operation, corresponding to the categorical class, is accumulated to the generic predicator apply operations. A generic promissary acceptor operation, corresponding to the categorical class, is accumulated to the generic promissary acceptor operations. A promissary dispatch in a categorical class definition, corresponding to the categorical class, is provided. The dispatch in turn dispatches to the generic promissary acceptor operation.

[0009] A plurality of class members are dispatched. The class members are included in the categorical class. A datum is viewed. The datum is included in the class members. A view to a datum type is dispatched. The datum type is associated with the datum.

[0010] A value type is received. A value predicator specialization is provided, corresponding to the value type for the datum. The value predicator specialization is derived from the predicator base class definition. The value predicator specialization includes a value specific predicator apply operation, corresponding to the generic predicator apply operation. The value predicator specialization is accumulated to a plurality of predicator specializations. The predicator specializations are included in the predicator definitions.

[0011] A reference type is received. A meron qualification is tested. The meron qualification is included in the datum. According to the success of the test for the meron qualification, an instantiating predicator specialization is provided, corresponding to the reference type for the datum. The instantiating predicator specialization is derived from the predicator base class definition. The instantiating predicator specialization includes an instantiating specific predicator apply operation, corresponding to the generic predicator apply operation. The instantiating predicator specialization is accumulated to the predicator specializations.

[0012] According to the failure of the test for the meron qualification, a promissary predicator specialization, is provided, corresponding to the reference type for the datum. The promissary predicator specialization is derived from the predicator base class definition. The promissary predicator specialization includes a promissary specific predicator apply operation, corresponding to the generic predicator apply operation. The promissary predicator specialization is accumulated to the predicator specializations. A promissary reference definition is written. The promissary reference definition is derived from the promissary reference base class definition. The promissary reference definition includes a specific promissary acceptor operation. The specific promissary acceptor operation corresponds to the generic promissary acceptor operation. The promissary ref-

erence definition is accumulated to a plurality of promissary reference definitions. The promissary reference definitions are included in the predicator definitions.

BRIEF DESCRIPTION OF DRAWINGS

- [0013] FIG. 1 depicts a generator which reads module specifications and writes programming language code and documentation corresponding to the specifications.
- [0014] FIG. 2 begins the depiction of a summary specification of an exemplary object-oriented module suitable for representation of specifications of object-oriented modules (1/2).
- [0015] FIG. 3 concludes the depiction of a summary specification of an exemplary object-oriented module suitable for representation of specifications of object-oriented modules (2/2).
- [0016] FIG. 4 depicts an informal definition of an exemplary class representing a unitary host element for representation of specifications of object-oriented modules.
- [0017] FIG. 5 depicts an informal definition of an exemplary class representing element elements.
- [0018] FIG. 6 depicts an informal definition of an exemplary class representing entity elements.
- [0019] FIG. 7 depicts an informal definition of an exemplary class representing module elements.
- [0020] FIG. 8 depicts an informal definition of an exemplary class representing class elements.
- [0021] FIG. 9 depicts an informal definition of an exemplary class representing host-class elements.
- [0022] FIG. 10 depicts an informal definition of an exemplary class representing operand elements.
- [0023] FIG. 11 depicts an informal definition of an exemplary class representing argument elements.
- [0024] FIG. 12 depicts an informal definition of an exemplary class representing member elements.
- [0025] FIG. 13 depicts an informal definition of an exemplary class representing member-function elements.
- [0026] FIG. 14 depicts an informal definition of an exemplary class representing member-datum elements.
- [0027] FIG. 15 depicts an informal definition of an exemplary class representing type elements.
- [0028] FIG. 16 depicts an informal definition of an exemplary class representing void-type elements.
- [0029] FIG. 17 depicts an informal definition of an exemplary class representing value-type elements.
- [0030] FIG. 18 depicts an informal definition of an exemplary class representing bit-type elements.
- [0031] FIG. 19 depicts an informal definition of an exemplary class representing integer-type elements.
- [0032] FIG. 20 depicts an informal definition of an exemplary class representing cardinal-type elements.
- [0033] FIG. 21 depicts an informal definition of an exemplary class representing text-type elements.
- [0034] FIG. 22 depicts an informal definition of an exemplary class representing reference-type elements.
- [0035] FIG. 23 depicts an informal definition of an exemplary class representing compound-type elements.
- [0036] FIG. 24 depicts an informal definition of an exemplary class representing sequence-type elements.
- [0037] FIG. 25 depicts an informal definition of an exemplary class representing value-sequence-type elements.
- [0038] FIG. 26 depicts an informal definition of an exemplary class representing reference-sequence-type elements.
- [0039] FIG. 27 depicts an informal definition of an exemplary class representing set-type elements.
- [0040] FIG. 28 depicts an informal definition of an exemplary class representing value-set-type elements.
- [0041] FIG. 29 depicts an informal definition of an exemplary class representing reference-set-type elements.
- [0042] FIG. 30 depicts an informal definition of an exemplary class representing map-type elements.
- [0043] FIG. 31 depicts an informal definition of an exemplary class representing index-map-type elements.
- [0044] FIG. 32 depicts an informal definition of an exemplary class representing scale-map-type elements.
- [0045] FIG. 33 depicts an informal definition of an exemplary class representing bind-map-type elements.
- [0046] FIG. 34 depicts an informal definition of an exemplary class representing convert-map-type elements.
- [0047] FIG. 35 depicts an informal definition of an exemplary class representing logger elements.
- [0048] FIG. 36 depicts an overview of a module.
- [0049] FIG. 37 depicts particulars of a module.
- [0050] FIG. 38 depicts a generated class definition for a class.
- [0051] FIG. 39 depicts a generated view dispatch member function for a class.
- [0052] FIG. 40 depicts a generated host class definition for a module.
- [0053] FIG. 41 depicts a generated viewer class definition for a module.
- [0054] FIG. 42 depicts generated member function definitions for the viewer class for a module.
- [0055] FIG. 43 depicts a generated factory class definition for a module.
- [0056] FIG. 44 depicts a builder class definition for an application.
- [0057] FIG. 45 depicts member function definitions for a builder class for an application.
- [0058] FIG. 46 depicts a page class definition for an application.
- [0059] FIG. 47 depicts an HTML writer class definition for an application.
- [0060] FIG. 48 depicts member function definitions for an HTML writer class for an application.
- [0061] FIG. 49 depicts additional member function definitions for an HTML writer class for an application.
- [0062] FIG. 50 depicts a main program for an application.
- [0063] FIG. 51 depicts a summary of the code generators.
- [0064] FIG. 52 depicts excerpts from generated forward class declarations for an exemplary module, generated by a forwards-writer generator.
- [0065] FIG. 53 depicts excerpts from generated class definitions for an exemplary module, generated by a classes-writer generator.
- [0066] FIG. 54 depicts excerpts from a generated viewer class for an exemplary module, generated by a viewer-writer generator.
- [0067] FIG. 55 depicts excerpts from member definitions of a generated viewer class for an exemplary module, generated by a viewer-writer generator.
- [0068] FIG. 56 depicts excerpts from a module specification for an exemplary module.
- [0069] FIG. 57 depicts excerpts from a generated acceptor class definition for an exemplary module, generated by an acceptors-writer generator.

[0070] FIG. 58 depicts excerpts from generated member function definitions for a generated acceptor class for an exemplary module, generated by an acceptors-writer generator.

[0071] FIG. 59 depicts excerpts from a generated class definition of an acceptor class specialization, generated by an acceptors-writer generator.

[0072] FIG. 60 depicts excerpts from a generated class definition of an acceptor host class specialization, generated by an acceptors-writer generator.

[0073] FIG. 61 depicts excerpts from generated member function definitions for a generated acceptor host class specialization, generated by an acceptors-writer generator.

[0074] FIG. 62 depicts excerpts from generated class definitions for classes from an exemplary module, including dispatch to an acceptor.

[0075] FIG. 63 depicts an accept-element member function suitable for markup processing.

[0076] FIG. 64 depicts excerpts from generated class definitions for predicator classes for processing predicates, generated by an acceptors-writer generator.

[0077] FIG. 65 depicts excerpts from generated class definitions for specializations of predicators.

[0078] FIG. 66 depicts excerpts from a generated promissary reference class, for deferred resolution of textual identifiers.

[0079] FIG. 67 depicts excerpts from generated classes illustrating dispatch to a promissary reference, acceptance of a promissary reference, and construction of a promissary reference in an predicator.

[0080] FIG. 68 depicts excerpts from a generated factory class definition including acceptor-hosts, generated by a factory-writer generator.

[0081] FIG. 69 depicts excerpts from generated member functions from a factory class, generated by a factory-writer generator.

[0082] FIG. 70 depicts excerpts from generated class definitions for a resolver and a depository, generated by a host-writer generator.

[0083] FIG. 71 depicts excerpts from generated class definitions for a host, generated by a host-writer generator.

[0084] FIG. 72 depicts excerpts from a generated class definition for a reflector, generated by a reflector-writer generator.

[0085] FIG. 73 depicts excerpts from a generated initialization for a reflector, generated by a reflector-writer generator.

[0086] FIG. 74 depicts additional excerpts from a generated initialization for a reflector, generated by a reflector-writer generator.

[0087] FIG. 75 depicts excerpts from a generated class definition for an auditor, generated by an auditor-writer generator.

[0088] FIG. 76 depicts a summary of the document generators.

DETAILED DESCRIPTION

1 Terminology

[0089] The present invention concerns the generation of module definitions from module specifications. For the purposes of this invention, a module definition is a collection of interrelated object-oriented class definitions and other elements of an object-oriented computer program. A module

specification is an object-oriented data structure typically derived from a textual expression prepared by a human programmer or a computer program. The module specification represents the classes and other elements that will be defined in the module definition.

[0090] Classes may be usefully divided into categorical classes and unitary classes. A categorical class corresponds to a category in a domain-specific model. Thus categorical classes are largely determined by the requirements of the domain to which applications of the specified module are directed. Instances of a categorical class are typically unbounded in number. Categorical classes are usually arranged in a hierarchy or directed acyclic graph reflecting the relations of genera and species among the domain-specific categories.

[0091] Unitary classes relate to the module as a whole. A host is one important unitary class. The host for a module provides a unitary representation of what is typically a multiplicity of objects. The objects are instances of the categorical classes. The host provides access to individual and collected instances according to an organizational scheme which reflects the requirements of the domain. Together with the categorical instances, the host provides a domain-specific object-oriented data structure which is convenient as a target for construction and as a source for processing.

[0092] The categorical classes of a module, corresponding to the categories of a domain, are characterized by member data. The form of the member data is specified in the class but each instance has its own copy of member data elements. Member data is characterized by its type. Type is a complex property of data in many object-oriented programming languages. In the present invention, a simplified type system is used, permitting concise specification and enforcing consistency of usage. Types include value types, reference types, and compound types.

[0093] Value types correspond to scalar data, in which the value of the data accords with the meaning of the data. Scalar data is typically represented by built-in types of a programming language (e.g. int, double, char, in the C language) or by simple classes (e.g. string, date) which may be passed by value (copying elements or structures). Scalar data is used to represent properties of instances, such as identifiers and measured quantities.

[0094] Reference types correspond to references to instances of categories. Reference data is typically represented by pointers or references in a programming language. The value of a pointer is arbitrary and bears no relation to the meaning of the object the pointer represents. Reference data is typically passed by reference (i.e. by copying pointers, not structures). Conceptually, reference data is used to implement associations among categories in which a first instance is associated with a second instance.

[0095] Compound types correspond to collections. Provision of collections varies widely in programming languages. However, for effective application programming, set, sequence, and map may be sufficient. A set is an unordered collection of elements which does not contain duplicates. A set provides efficient determination of the presence or absence of an element. A set also provide efficient insertion and deletion of an element. Efficient iteration of the constituent elements of a set is another requirement. Efficient in this context means logarithmic in the number of contained

elements for determination, insertion, and deletion. Sets may contain reference or value data.

[0096] A sequence is an ordered collection which provides efficient insertion and deletion of elements at either end of the sequence, thus permitting stack, queue, and deque functionality. A sequence may also provide efficient random access to individual elements by offset in the collection order. A sequence also provides efficient iteration of the elements in order. Sequences may contain reference or value data.

[0097] A map provides efficient association between domain and range elements. Given a domain element, a map efficiently produces a corresponding range element or indicates the absence of such an element. Maps must efficiently support insertion and deletion of domain, range pairs. Maps support all combinations of range and domain value and reference. An index denotes a map with a value domain and a reference range. A scale denotes a map with a reference domain and a value range. A binding denotes a map with reference domain and range. A conversion denotes a map with value domain and range.

[0098] Member data having singular or compound reference type may be characterized by a meron qualification. Qualification as a meron indicates that the referenced element should be considered a part of the referencing element. The term is a contraction of the linguistic term “meronym”, which is used to distinguish a part in a part/whole relationship. Used in a module specification, meron qualification determines memory management, where applicable, as well as default behavior in the base viewer and the base editor. In the default view of an instance, its merons will be viewed. Non-meron references are ignored by default.

2 System Overview

[0099] Refer to FIG. 1. A generator **1000** processes module specifications compatible with a grammar **1002** to produce generated-code **1004** and generated-documents **1006**. The specifications are processed by a parser **1008**, which constructs an object-oriented data structure encapsulated in a host **1010**. The host **1010** represents the specified modules as an object-oriented data structure. The constituent module specifications of the host **1010** are processed by a code-generator **1012** to provide the generated-code **1004**. The generated code includes software components written in a conventional object-oriented programming language. The constituent module specifications of the host **1010** are also processed by a document-generator **1014** to provide the generated-documents **1006**. The generated documentation includes descriptions and figures which characterize the specified modules.

[0100] The present invention relates to aspects of the processing of the constituent module specifications of the host **1010** by the code-generator **1012** and the document-generator **1014** to produce the generated-code **1004** and the generated-documents **1006**. Co-pending applications relate to the language of the grammar **1002** the parser **1008**, and other aspects of the code-generator **1012**.

3 Meta-Module Description

[0101] Refer to FIG. 2. A discursive-model meta-module **1016** specifies classes for representation and processing of modules for object-oriented programming. The meta-module **1016** has a host class host **1018**.

[0102] The host **1018** represents an instantiation of the module. A datum modules **1020** collects module specifications. A datum types **1022** collects types defined amongst modules for memory management.

[0103] A categorical class element **1024** defines a common base for parsed elements.

[0104] A categorical class entity **1026** represents named elements. The entity **1026** has genus element **1024**.

[0105] A categorical class module **1028** represents a collection of interrelated classes for object-oriented programming. The module **1028** has genus entity **1026**. A datum classes **1030** represents the collection of classes within a module. A datum forward-classes **1032** represents related classes which are used within a particular module but are not defined in the module. A datum host **1034** represents a class, an instance of which encapsulates an application-specific object-oriented data structure corresponding to an instantiation of a module.

[0106] A categorical class class **1036** represents a class for object-oriented programming. The class **1036** has genus entity **1026**. A datum members **1038** represents the members of a particular class.

[0107] A categorical class host-class **1040** represents an instantiation of a module. The host-class **1040** has genus class **1036**.

[0108] A categorical class operand **1042** represents a typed entity in a scope. The operand **1042** has genus entity **1026**.

[0109] A categorical class argument **1044** represents an argument to a member function. The argument **1044** has genus operand **1042**.

[0110] A categorical class member **1046** represents a member in a class. The member **1046** has genus operand **1042**.

[0111] A categorical class member-function **1048** represents a member function in a class. The member-function **1048** has genus member **1046**. A datum arguments **1050** specifies the arguments to a member function.

[0112] A categorical class member-datum **1052** represents a member datum in a class. The member-datum **1052** has genus member **1046**.

[0113] Refer to FIG. 3. A categorical class type **1054** characterizes the typing of an operand. The type **1054** has genus element **1024**.

[0114] A categorical class void-type **1056** characterizes the absence of a type. The void-type **1056** has genus type **1054**.

[0115] A categorical class value-type **1058** characterizes a type which is passed by value. The value-type **1058** has genus type **1054**.

[0116] A categorical class bit-type **1060** represents a Boolean value, true or false. The bit-type **1060** has genus value-type **1058**.

[0117] A categorical class integer-type **1062** represents an integral value. The integer-type **1062** has genus value-type **1058**.

[0118] A categorical class cardinal-type **1064** represents a non-negative integral value. The cardinal-type **1064** has genus value-type **1058**.

[0119] A categorical class text-type **1066** represents a textual value. The text-type **1066** has genus value-type **1058**.

[0120] A categorical class reference-type **1068** characterizes a type which is passed by reference. The reference-type **1068** has genus type **1054**.

[0121] A categorical class compound-type **1070** characterizes a type which corresponds to a collection. The compound-type **1070** has genus type **1054**.

[0122] A categorical class sequence-type **1072** characterizes a sequence of elements. The sequence-type **1072** has genus compound-type **1070**.

[0123] A categorical class value-sequence-type **1074** characterizes a sequence of value-typed elements. The value-sequence-type **1074** has genus sequence-type **1072**.

[0124] A categorical class reference-sequence-type **1076** characterizes a sequence of reference-typed elements. The reference-sequence-type **1076** has genus sequence-type **1072**.

[0125] A categorical class set-type **1078** characterizes a set of elements. The set-type **1078** has genus compound-type **1070**.

[0126] A categorical class value-set-type **1080** characterizes a set of value-typed elements. The value-set-type **1080** has genus set-type **1078**.

[0127] A categorical class reference-set-type **1082** characterizes a set of reference-typed elements. The reference-set-type **1082** has genus set-type **1078**.

[0128] A categorical class map-type **1084** characterizes a map associating pairs of elements. The map-type **1084** has genus compound-type **1070**.

[0129] A categorical class index-map-type **1086** characterizes a map, of which the range elements are of reference type and the domain elements are of value type. The index-map-type **1086** has genus map-type **1084**.

[0130] A categorical class scale-map-type **1088** characterizes a map, of which the range elements are of value type and the domain elements are of reference type. The scale-map-type **1088** has genus map-type **1084**.

[0131] A categorical class bind-map-type **1090** characterizes a map, of which both the range and domain elements are of reference type. The bind-map-type **1090** has genus map-type **1084**.

[0132] A categorical class convert-map-type **1092** characterizes a map, of which both the range and domain elements are of value type. The convert-map-type **1092** has genus map-type **1084**.

[0133] A categorical class logger **1094** provides logging services.

3.1 Host Class

[0134] Refer to FIG. 4. The host **1018** represents an instantiation of the module. The modules **1020** collects module specifications. The modules **1020** ranges over instances of the class module **1028**. The modules **1020** is a meron. A method module **1096** maps module identifiers to module specifications. A datum module-index **1098** maps module identifiers to module specifications. The module-index **1698** ranges over instances of the class module **1028**. A method accept-module **1100** accepts a module specification. The types **1022** collects types defined amongst modules for memory management. The types **1022** ranges over instances of the class type **1054**. The types **1022** is a meron. A method accept-type **1102** accepts a supplied type instance

for accumulation in types **1022**. The accept-type **1102** always accepts the supplied type.

3.2 Element Categorical Class

[0135] Refer to FIG. 5. The element **1024** defines a common base for parsed elements. The element **1024** is a root-level class of the meta-module **1016**. A datum source **1104** identifies the source file and line from which the element was parsed. The source **1104** is useful for reporting errors. The source **1104** ranges over scalar text.

3.3 Entity Categorical Class

[0136] Refer to FIG. 6. The entity **1026** represents named elements. The entity **1026** has genus element **1024**. A datum id **1106** uniquely identifies a particular entity in a global scope. The id **1106** is required. The id **1106** ranges over scalar text. A datum term **1108** provides a text-friendly identifier, not necessarily unique. The term **1108** is used in the generated particulars of an entity. The term **1108** is required. The term **1108** ranges over scalar text. A datum title **1110** provides a text-friendly phrase, suitable for heading a section or figure. The title **1110** ranges over scalar text. The title **1110** is currently ignored except for module and class. A datum purpose **1112** describes the purpose of a particular entity. The purpose **1112** should be a predicate corresponding to the entity as a subject. The purpose **1112** ranges over scalar text. A datum passage **1114** indicates the segment in which to present a particular entity. The passage **1114** ranges over scalar text. The passage **1114** should be restricted to the class **1036** and the module **1028**. A datum remarks **1116** provides primary supplemental descriptive information pertaining to a particular entity. The remarks **1116** should be a predicate corresponding to the entity as a subject. The remarks **1116** are presented at the beginning of the generated particulars of a particular entity. The remarks **1116** ranges over scalar text. A datum notes **1118** provides secondary supplemental descriptive information pertaining to a particular entity. The notes **1118** should be a predicate corresponding to the entity as a subject. The notes **1118** are presented at the end of the generated particulars of a particular entity. The notes **1118** ranges over scalar text.

3.4 Module Categorical Class

[0137] Refer to FIG. 7. The module **1028** represents a collection of interrelated classes for object-oriented programming. The module **1028** has genus entity **1026**. The classes **1030** represents the collection of classes within a module. The classes **1030** ranges over instances of the class class **1036**. The classes **1030** is a meron. A datum class-index **1120** associates a particular class **1036** with its unique id **1106**. The class-index **1120** ranges over instances of the class class **1036**. A method accept-class **1122** accepts an instance of the class **1036** as a constituent of a module. The accept-class **1122** updates the classes **1030** and the class-index **1120**. The accept-class **1122** fails on duplicate id **1106**. A method resolve-class **1124** resolves a textual identifier to an instance of the class **1036** which is a constituent of a module. The resolve-class **1124** uses the class-index **1120**. A method sort-classes **1126** performs topological sort of module classes to ensure that no class is defined before its genera. The forward-classes **1032** represents related classes which are used within a particular module but are not defined in the module. The forward-classes **1032** ranges over

instances of the class class **1036**. The forward-classes **1032** is a meron. A method accept-forward-class **1128** accepts an instance of the class **1036** as a forward class definition. The accept-forward-class **1128** updates the forward-classes **1130** and the class-index **1120**. The accept-forward-class **1128** assumes memory management of the supplied class. A datum root-classes **1132** represents the collection of classes with a module which do not have any generalizations within the module. The root-classes **1132** is a subset of the classes **1030**. The root-classes **1132** ranges over instances of the class class **1036**. The host **1034** represents a class, an instance of which encapsulates an application-specific object-oriented data structure corresponding to an instantiation of a module. The host **1034** is the target for module-scoped member specifications. The host **1034** instance may be denoted as a model object or a document object. The host **1034** may contain resolver, depository, factory, reflector, etc. according to specification. The host **1034** ranges over instances of the class host-class **1040**. The host **1034** is a meron. A method accept-host **1134** accepts an instance of the host-class **1040** for assignment to the host **1034**. The accept-host **1134** fails if the host class instance is already defined. A datum viewer-id **1136** specifies a view operator to be generated; the generated viewer provides a useful base class for read-only operators that process an instantiation of a module. The viewer-id **1136** ranges over scalar text. A datum editor-id **1138** specifies an edit operator to be generated; the generated editor provides a useful base class for write-capable operators that process an instantiation of a module. The editor-id **1138** ranges over scalar text. A datum factory-id **1140** specifies a factory operator to be generated; the generated factory provides text-driven instantiation of objects from the classes of a module. The factory-id **1140** is particularly useful for processing markup. The factory-id **1140** ranges over scalar text. A datum factory-root-id **1142** specifies the base class from which factory-generated classes must derive; cf. the factory-id **1140**. The factory-root-id **1142** ranges over scalar text. A datum auditor-id **1144** specifies an auditor operator to be generated; the generated auditor determines conformance with specified requirements. The auditor-id **1144** ranges over scalar text. A datum reflector-id **1146** specifies a reflector operator to be generated; the generated reflector provides a run-time representation of the specialization and generalization relationships of the classes of a module. The reflector-id **1146** ranges over scalar text. A datum parser-id **1148** specifies an external parser class, for which lexical responders shall be generated to facilitate generic processing of assignments from predicates. The parser-id **1148** ranges over scalar text. A datum resolver-id **1150** specifies a resolver operator to be generated; the generated resolver provides resolution of identifiers to instances. The resolver-id **1150** uses the member specified by the resolver-id-field **1152** of the class specified by the resolver-root-id **1154**. The resolver-id **1150** resolves identifiers to instances of the class specified by the resolver-root-id **1154**. The resolver-id **1150** ranges over scalar text. The resolver-id **1150** specializes the editor operator specified by the editor-id **1138**. A datum resolver-root-id **1154** specifies the common base class for resolution. The resolver-root-id **1154** must have a member datum or function corresponding to the resolver-id-field **1152**. The resolver-root-id **1154** ranges over scalar text. A datum resolver-id-field **1152** specifies the member of the class specified by the resolver-root-id **1154** which uniquely identifies instances of the class

specified by the resolver-root-id **1154**. The resolver-id-field **1152** is used by the generated resolver. The resolver-id-field **1152** must be a member datum or member function of the class specified by the resolver-root-id **1154**. The resolver-id-field **1152** ranges over scalar text. A datum acceptor-id **1156** specifies an acceptor class to be generated; the generated acceptor serves as a genus class for specific acceptor classes, also to be generated. The acceptor-id **1156** is particularly useful for parsing and processing markup. The acceptor-id **1156** ranges over scalar text. A datum predicator-id **1158** specifies a predicator class to be generated; the generated predicator serves as a genus class for specific predicator classes, also to be generated. The predicator-id **1158** is particularly useful for parsing and processing markup. The predicator-id **1158** ranges over scalar text. A method qualifier-id **1160** specifies a qualifier class, specializing the predicator, to be generated. A method singleton-id **1162** specifies a singleton class, specializing the predicator, to be generated. A method plurality-id **1164** specifies a plurality class, specializing the predicator, to be generated. A method predicator-sequence-id **1166** specifies a class providing a sequence of predicators, to be generated. A method promissary-reference-id **1168** specifies a class providing a deferred resolution of a textual reference. A method depository-id **1170** specifies a depository class, holding promissary references for eventual redemption. A datum predicator-host-id **1172** specifies a predicator host class to be generated; the generated predicator host serves predicators corresponding to predicates. The predicator-host-id **1172** is particularly useful for processing markup. The predicator-host-id **1172** ranges over scalar text.

3.5 Class Categorical Class

[**10138**] Refer to FIG. 8. The class **1036** represents a class for object-oriented programming. The class **1036** has genus entity **1026**. A datum module **1174** represents a particular instance of the module **1028** of which a particular class is a constituent. The module **1174** is complementary to the classes **1030**. The module **1174** ranges over instances of the class module **1028**. A datum genera **1176** represents the collection of classes from which a particular class is derived. The genera **1176** includes the closest generalizations of a particular class. The genera **1176** ranges over instances of the class class **1036**. The members **1038** represents the members of a particular class. The members **1038** may include data members and function members. The members **1038** ranges over instances of the class member **1046**. The members **1038** is a meron. A datum member-index **1178** associates members with their scoped identifiers. The member-index **1178** ranges over instances of the class member **1046**. A datum species **1180** represents the collection of classes which are derived from a particular class. The species **1180** are the closest specializations of a particular class. The species **1180** are useful for depth-first processing of classes in a module; cf. the root-classes **1132**. The species **1180** is complementary to the genera **1176**. The species **1180** ranges over instances of the class class **1036**. A datum genera-closure **1182** represents the totality of classes in the ancestry of a class. The genera-closure **1182** includes all the generalizations of a particular class. The genera-closure **1182** ranges over instances of the class class **1036**. A datum species-closure **1184** represents the totality of classes descending from a class. The species-closure **1184** includes all the specializations of a particular class. The species-

closure **1184** is complementary to the genera-closure **1182**. The species-closure **1184** ranges over instances of the class class **1036**. A datum is-module-root **1186** indicates whether a particular class lacks any generalizations in its containing module **1028**. The is-module-root **1186** corresponds to membership in the root-classes **1132**. The is-module-root **1186** ranges over scalar boolean. A datum constructs-markup-element **1188** indicates responsiveness to element construction in processing markup. The constructs-markup-element **1188** is applicable to the host only. The constructs-markup-element **1188** ranges over scalar boolean. A datum accepts-markup-element **1190** indicates responsiveness to elements in processing markup. The accepts-markup-element **1190** ranges over scalar boolean. A datum accepts-markup-text **1192** indicates responsiveness to text in processing markup. The accepts-markup-text **1192** ranges over scalar boolean. A datum accepts-markup-predicate **1194** indicates responsiveness to predicates in processing markup. The accepts-markup-predicate **1194** ranges over scalar boolean. A datum markup-configure **1196** indicates responsiveness to element configuration in processing markup. The markup-configure **1196** ranges over scalar boolean. A datum markup-commit **1198** indicates responsiveness to element commitment in processing markup. The markup-commit **1198** ranges over scalar boolean. A datum is-pure-abstract **1200** indicates whether class is not instantiable due to pure member functions. The is-pure-abstract **1200** is computed at module instantiation; do not set. The is-pure-abstract **1200** ranges over scalar boolean. A method accept-member **1202** accumulates a member. The accept-member **1202** updates the members **1038** and the member-index **1178**. The accept-member **1202** fails on duplicate scoped identifiers for members. A datum provides-downcast **1204** specifies the provision of a safe downcast to immediate species of a class. The provides-downcast **1204** is occasionally useful but easily abused; beware. The provides-downcast **1204** ranges over scalar boolean. A datum tags **1206** indicates generic textual identifiers usable for instantiation of a particular class. The tags **1206** are especially useful for parsing text and processing markup. The tags **1206** ranges over scalar text. A method acceptor-host-id **1208** specifies a class which maps tags to acceptors. A datum audit-requirements **1210** specifies boolean conditions that may be verified by a generated auditor as specified by the auditor-id **1212**. The audit-requirements **1210** ranges over scalar text. A datum auditor-context **1214** supplies reporting context for auditor. The auditor-context **1214** must evaluate to an instance of text. The auditor-context **1214** ranges over scalar text.

3.6 Host Class Categorical Class

[0139] Refer to FIG. 9. The host-class **1040** represents an instantiation of a module. The host-class **1040** represents the totality of an application-specific object-oriented data structure. The host-class **1040** corresponds to the host **1034**. The host-class **1040** typically occurs in a singleton instance per application. The host-class **1040** provides a useful target for parsing, markup, etc. The host-class **1040** has genus class **1036**.

3.7 Operand Categorical Class

[0140] Refer to FIG. 10. The operand **1042** represents a typed entity in a scope. The operand **1042** has genus entity **1026**. A datum scope-handle **1216** informally identifies an

operand in a scope. The scope-handle **1216** ranges over scalar text. A method validate-handle **1218** ensures that a proposed handle does not conflict with C++ reserved words. A method accept-scope-handle **1220** provides an acceptor for the scope-handle **1216**. A datum scope-id **1222** uniquely identifies an operand in a scope. The scope-id **1222** is applicable to members in a class scope and arguments in a member function scope. The scope-id **1222** ranges over scalar text. A datum is-const **1224** indicates whether the operand may be modified in the scope. The is-const **1224** ranges over scalar boolean. A datum type **1226** specifies the type of an operand. The type **1226** ranges over instances of the class type **1054**.

3.8 Argument Categorical Class

[0141] Refer to FIG. 11. The argument **1044** represents an argument to a member function. The argument **1044** has genus operand **1042**. A datum position **1228** indicates the position of the argument in the member function argument sequence. The position **1228** ranges over scalar cardinal. A datum arg-default **1230** indicates a default value for the argument. The arg-default **1230** ranges over scalar text.

3.9 Member Categorical Class

[0142] Refer to FIG. 12. The member **1046** represents a member in a class. The member **1046** has genus operand **1042**. A datum member-class **1232** identifies the class which specifies the member. The member-class **1232** ranges over instances of the class class **1036**.

3.10 Member Function Categorical Class

[0143] Refer to FIG. 13. The member-function **1048** represents a member function in a class. The member-function **1048** has genus member **1046**. A datum is-static **1234** indicates a class function. The is-static **1234** is invoked independently of any instance of the class. The is-static **1234** ranges over scalar boolean. A datum is-virtual **1236** indicates a virtual member function. The is-virtual **1236** ranges over scalar boolean. A datum is-pure **1238** indicates a pure virtual member function. The is-pure **1238** implies is-virtual **1236**, but not vice versa. The is-pure **1238** precludes instantiation of the containing class when set. The is-pure **1238** ranges over scalar boolean. The arguments **1050** specifies the arguments to a member function. The arguments **1050** ranges over instances of the class argument **1044**. The arguments **1050** is a meron. A datum inline-definition **1240** specifies the inline definition of a member function. The inline-definition **1240** ranges over scalar text. A datum definition **1242** specifies the definition of a member function. The definition **1242** precludes the inline definition of a member function. The definition **1242** ranges over scalar text. A datum indicates **1244** describes the meaning of the return value of a member function. The indicates **1244** should be a complement to "The member returns a [type], indicating . . .". The indicates **1244** ranges over scalar text.

3.11 Member Datum Categorical Class

[0144] Refer to FIG. 14. The member-datum **1052** represents a member datum in a class. The member-datum **1052** has genus member **1046**. A datum is-meron **1246** indicates that a member datum is a meronym of the containing instance of the class to which it belongs. The is-meron **1246** indicates that the member datum is to be deleted on deletion

of the containing instance. The is-meron **1246** indicates that, by default, viewers and editors of the module should recursively visit the member datum when visiting the containing instance. The is-meron **1246** ranges over scalar boolean. A datum is-mutable **1248** indicates that non-const access to a member datum is provided even when the containing instance is const. The is-mutable **1248** ranges over scalar boolean. A datum init **1250** indicates an initial value for the datum at instantiation. The init **1250** ranges over scalar text. A method predicator-class-id **1252** specifies an identifier for a predicator class which will mediate transformation from a textual representation to a type-safe object-oriented element. The predicator-class-id **1252** identifies a class which is applicable for direct processing of scalars and meron references in predicates and attributes; a promissary reference is used to process non-meron references. A method promissary-class-id **1254** specifies an identifier for a promissary class which will mediate deferred transformation from a textual reference to a type-safe object-oriented element. The promissary-class-id **1254** identifies a class which is applicable for processing non-meron references in predicates and attributes. A method acceptor-class-id **1256** specifies an identifier for an acceptor class which will receive and assign instances. The acceptor-class-id **1256** identifies a class which is applicable for processing contained markup elements. A method generic-acceptor-id **1258** specifies an identifier for a member function which provides a uniform acceptance interface (assignment or accumulation) for elements of the proper type. The generic-acceptor-id **1258** identifies a member function which is required by acceptors and predicadors. A datum acceptor **1260** specifies a member function to which assignment or accumulation of the datum is restricted. The acceptor **1260** ranges over instances of the class member-function **1048**. The acceptor **1260** should indicate a member function which returns a boolean indicating the success of the attempted assignment. A datum inhibit-predicator **1262** prevents automatic generation of a predicator for use in parsing and processing markup. The inhibit-predicator **1262** typically used with an acceptor where the underlying member datum is a secondary target, e.g. an index associated with a sequence. The inhibit-predicator **1262** ranges over scalar boolean. A datum tags **1264** specifies textual identifiers usable for instantiation of a particular class and subsequently for assignment to a particular member. The tags **1264** are especially useful for parsing text and processing markup. The tags **1264** ranges over scalar text. A datum handles **1266** permit scope-specific alternative identification. The handles **1266** must be unique in scope. The handles **1266** are used as identifiers in the generation of convenience member functions. The handles **1266** ranges over scalar text. A method accept-handle **1268** validates and accepts the supplied handle.

3.12 Type Categorical Class

[0145] Refer to FIG. 15. The type **1054** characterizes the typing of an operand. The type **1054** has genus element **1024**. A method type-text **1270** provides a textual representation of a type. A method is-plural **1272** distinguishes plural from singleton types. The is-plural **1272** is false, by default; non-compound types are singular.

3.13 Void Type Categorical Class

[0146] Refer to FIG. 16. The void-type **1056** characterizes the absence of a type. The void-type **1056** has genus type **1054**. A method type-text **1274** returns "Void".

3.14 Value Type Categorical Class

[0147] Refer to FIG. 17. The value-type **1058** characterizes a type which is passed by value. The value-type **1058** has genus type **1054**.

3.15 Bit Type Categorical Class

[0148] Refer to FIG. 18. The bit-type **1060** represents a Boolean value, true or false. The bit-type **1060** has genus value-type **1058**. A method type-text **1276** returns "Bit".

3.16 Integer Type Categorical Class

[0149] Refer to FIG. 19. The integer-type **1062** represents an integral value. The integer-type **1062** has genus value-type **1058**. A method type-text **1278** returns "Integer".

3.17 Cardinal Type Categorical Class

[0150] Refer to FIG. 20. The cardinal-type **1064** represents a non-negative integral value. The cardinal-type **1064** useful for counting. The cardinal-type **1064** has genus value-type **1058**. A method type-text **1280** returns "Cardinal".

3.18 Text Type Categorical Class

[0151] Refer to FIG. 21. The text-type **1066** represents a textual value. The text-type **1066** has genus value-type **1058**. A method type-text **1282** returns "Text".

3.19 Reference Type Categorical Class

[0152] Refer to FIG. 22. The reference-type **1068** characterizes a type which is passed by reference. The reference-type **1068** corresponds to a class. The reference-type **1068** has genus type **1054**. A datum reference-class-id **1284** identifies the class to which a reference type corresponds. The reference-class-id **1284** ranges over scalar text. A method type-text **1286** returns the reference-class-id **1284**.

3.20 Compound Type Categorical Class

[0153] Refer to FIG. 23. The compound-type **1070** characterizes a type which corresponds to a collection. The compound-type **1070** is parameterized by one or more subsidiary types. The compound-type **1070** has genus type **1054**. A datum parameters **1288** specifies the subsidiary types by which a compound type is parameterized. The parameters **1288** ranges over instances of the class type **1054**. A method type-text **1290** has unspecified purpose. A method compound-text **1292** specifies the particular compound, e.g. sequence, set, etc.. A method is-plural **1294** has unspecified purpose. The is-plural **1294** is true, by default; compound types are plural. A datum range **1296** specifies the

characteristic subsidiary type of the elements in the compound type. The range **1296** ranges over instances of the class type **1054**.

3.21 Sequence Type Categorical Class

[0154] Refer to FIG. **24**. The sequence-type **1072** characterizes a sequence of elements. The sequence-type **1072** specifies a compound element that permits efficient addition or removal of elements at the front or back of the sequence. The sequence-type **1072** specifies a compound element that permits direct access to elements by position in the sequence. The sequence-type **1072** specifies a compound element that permits iteration of the elements in the sequence. The sequence-type **1072** has genus compound-type **1070**. A method compound-text **1298** has unspecified purpose. The compound-text **1298** returns “Sequence”.

3.22 Value Sequence Type Categorical Class

[0155] Refer to FIG. **25**. The value-sequence-type **1074** characterizes a sequence of value-typed elements. The value-sequence-type **1074** has genus sequence-type **1072**. A datum value-range **1300** specifies the value type of the sequence elements. The value-range **1300** ranges over instances of the class value-type **1058**.

3.23 Reference Sequence Type Categorical Class

[0156] Refer to FIG. **26**. The reference-sequence-type **1076** characterizes a sequence of reference-typed elements. The reference-sequence-type **1076** has genus sequence-type **1072**. A datum reference-range **1302** specifies the reference type of the sequence elements. The reference-range **1302** ranges over instances of the class reference-type **1068**.

3.24 Set Type Categorical Class

[0157] Refer to FIG. **27**. The set-type **1078** characterizes a set of elements. The set-type **1078** specifies a compound element that permits efficient determination of the presence or absence of a particular element in the set. The set-type **1078** specifies a compound element that permits iteration of elements in the set. The set-type **1078** has genus compound-type **1070**. A method compound-text **1304** has unspecified purpose. The compound-text **1304** returns “Set”.

3.25 Value Set Type Categorical Class

[0158] Refer to FIG. **28**. The value-set-type **1080** characterizes a set of value-typed elements. The value-set-type **1080** has genus set-type **1078**. A datum value-range **1306** specifies the value type of the set elements. The value-range **1306** ranges over instances of the class value-type **1058**.

3.26 Reference Set Type Categorical Class

[0159] Refer to FIG. **29**. The reference-set-type **1082** characterizes a set of reference-typed elements. The reference-set-type **1082** has genus set-type **1078**. A datum reference-range **1308** specifies the reference type of the set elements. The reference-range **1308** ranges over instances of the class reference-type **1068**.

3.27 Map Type Categorical Class

[0160] Refer to FIG. **30**. The map-type **1084** characterizes a map associating pairs of elements. The map-type **1084**

specifies a compound element that permits association of a range element with a supplied domain element. The map-type **1084** specifies a compound element that permits iteration of pairs. The map-type **1084** has genus compound-type **1070**. A datum domain **1310** specifies the subsidiary type of the domain elements. The domain **1310** ranges over instances of the class type **1054**. A method compound-text **1312** has unspecified purpose. The compound-text **1312** returns “Map”.

3.28 Index Map Type Categorical Class

[0161] Refer to FIG. **31**. The index-map-type **1086** characterizes a map, of which the range elements are of reference type and the domain elements are of value type. The index-map-type **1086** has genus map-type **1084**. A datum value-domain **1314** specifies the value type of the map domain. The value-domain **1314** ranges over instances of the class value-type **1058**. A datum reference-range **1316** specifies the reference type of the map range. The reference-range **1316** ranges over instances of the class reference-type **1068**.

3.29 Scale Map Type Categorical Class

[0162] Refer to FIG. **32**. The scale-map-type **1088** characterizes a map, of which the range elements are of value type and the domain elements are of reference type. The scale-map-type **1088** has genus map-type **1084**. A datum reference-domain **1318** specifies the reference type of the map domain. The reference-domain **1318** ranges over instances of the class reference-type **1068**. A datum value-range **1320** specifies the value type of the map range. The value-range **1320** ranges over instances of the class value-type **1058**.

3.30 Bind Map Type Categorical Class

[0163] Refer to FIG. **33**. The bind-map-type **1090** characterizes a map, of which both the range and domain elements are of reference type. The bind-map-type **1090** has genus map-type **1084**. A datum reference-domain **1322** specifies the reference type of the map domain. The reference-domain **1322** ranges over instances of the class reference-type **1068**. A datum reference-range **1324** specifies the reference type of the map range. The reference-range **1324** ranges over instances of the class reference-type **1068**.

3.31 Convert Map Type Categorical Class

[0164] Refer to FIG. **34**. The convert-map-type **1092** characterizes a map, of which both the range and domain elements are of value type. The convert-map-type **1092** has genus map-type **1084**. A datum value-domain **1326** specifies the value type of the map domain. The value-domain **1326** ranges over instances of the class value-type **1058**. A datum value-range **1328** specifies the value type of the map range. The value-range **1328** ranges over instances of the class value-type **1058**.

3.32 Logger Categorical Class

[0165] Refer to FIG. **35**. The logger **1094** provides logging services. The logger **1094** is a root-level class of the meta-module **1016**.

4 Media Scanner

[0166] A simple application demonstrates the use of the module generator. The demonstration application recur-

sively scans one or more file-system directories looking for media files. The media files which are detected are presented in a collection of interlinked HTML pages. The pages of the presentation reflect the directory organization of the scanned directories. Each discovered media file is presented in a hypertext link. The pages of the presentation are suitable for service by a web server running on a dedicated media device, such as a digital video recorder. Activation of a link presenting a particular media file generates a request to play the associated media on the dedicated media device. The application may form a potentially useful element for remote, web-oriented management of a dedicated media device.

[0167] The demonstration application uses a representation of media files in a file system. The representation uses an object-oriented module including a family of interrelated classes. The classes represent files and directories. The object-oriented module is specified using a module specification language.

[0168] FIG. 36 specifies a class hierarchy which is useful for the media scanner application. The specification is an expression in the synthetic module specification language, which is part of the module generator. Specifications are typically written by a human developer but in some cases a specification may be provided by a computer program. Specifications are processed by a parser to construct a representation of the specified module. The representation is processed to generate object-oriented classes and documentation.

[0169] Refer to FIG. 36. A module media-scanner 1330 represents media files arranged in a file system. The media-scanner 1330 includes the following classes. A class file 1332 represents a file in a file system, including regular files and directories. The file 1332 has no genera. A class directory 1334 represents a file system directory, potentially containing files, some of which may themselves be directories. The directory 1334 specializes the file 1332. A class top-directory 1336 represents a topmost directory from which a scan has been initiated. The top-directory 1336 specializes the directory 1334. A class regular-file 1338 represents a regular file, i.e. a file which is not a directory. The regular-file 1338 specializes the file 1332. A class audio-file 1340 represents an audio file. The audio-file 1340 specializes the regular-file 1338. A class video-file 1342 represents a video file. The video-file 1342 specializes the regular-file 1338.

4.1 Specifying a Class Hierarchy

[0170] FIG. 36 is a skeletal representation of the module media-scanner 1330; it specifies only the module's class hierarchy. At the outermost level, the module media-scanner 1330 is specified. A module is represented by a top-level identifier, optional predicates (none are shown here), and a body. The body is delimited by curly brackets. The body defines a scope within which classes may be specified. Members of a host class may also be specified in the module scope; the host will be considered below.

[0171] A module body may contain class specifications. A class is specified by an identifier, optional predicates, and a body delimited by curly brackets. The body defines a class scope within which data members, member functions, and specialized classes may be specified. In FIG. 36, the class file 1332 is specified. Within the body of the file 1332, the species class directory 1334 and the species class regular-file

1338 are specified; the position of specialization classes indicates their relationship to the genus class file 1332. Similarly, the class top-directory 1336, specified within the scope of the directory 1334, is indicated as a species of the directory 1334. The classes audio-file 1340 and video-file 1342 are indicated as species of the regular-file 1338 by their position with the body of the regular-file 1338.

4.2 Specifying Members

[0172] FIG. 36 illustrates a specification of genus and species relationships among classes in a class hierarchy. Data members and member functions may also be specified using the specification language. A data member is specified by a type, an identifier, optional predicates, and a semicolon terminator. A member function is specified by a type, an identifier, an argument list, optional predicates, and a semicolon terminator. The argument list is delimited by parentheses; the arguments, if any, are separated by comments. Each argument is specified by a type, an optional identifier, and optional predicates.

[0173] Refer to FIG. 37, which expands the specification of FIG. 36 to incorporate members and predicates. The class file 1332 includes a member datum parent 1344, a reference to an instance of the directory 1334. A text member datum name 1346 represents the name of a particular file in its containing directory. A member function path 1348, returning text, provides the full path to a particular file. The definition of the path 1348 is augmented by several predicates (virtual and const); predicates will be considered below the immediately following discussion of types.

[0174] The parent 1344 and the name 1346 are respectively typed as a reference to an instance of the directory 1334 and as text. These two types illustrate two of the three most important type distinctions in the module generator: value and reference types. The name 1346 is of text type. Text is considered a value type in the module generator. As such, all the relevant information about the text is contained in its value. Other value types include integer, cardinal, and bit. Value types are scalar; they may be ordered (scaled). Value types correspond to things that can be measured, read, and copied. The relationships that value types represent are denoted as properties (or qualities, in the case of bit values), by analogy with such physical properties as mass, temperature, volume, etc., to emphasize measurability. In object-oriented implementations, instances of value types are usually transferred by copying values.

[0175] The parent 1344 is of reference type; it refers to an instance of a class from the module. Reference types are so-called because they permit a reference to an entity but the content of the reference itself is fundamentally arbitrary. A reference is like a name; it's a label which picks out a particular entity but the content of the label is only significant for its uniqueness. Having a reference, like knowing a name, confers no intrinsic information. Also like a name, a reference is potentially useful for obtaining information about the entity to which it refers. References do not support measurement. References may be tested for equality but ordering of references is meaningless. Of course, entities may be ordered by evaluating properties of the entities, and using an ordering of the evaluated properties to order the entities. The relationships that reference types represent are denoted as associations, to emphasize that they associate entities. In object-oriented implementations, instances of reference types are usually transferred by copying pointers.

[0176] A third type distinction recognized by the module generator is the compound type. A compound type represents a collection of scalars or entities; hence it is characterized by both the nature of the collection and by the underlying type of the instances which it collects. The module generator supports sequence, set, and map collections. A sequence provides an ordered collection, to which elements may be added or removed at the front or the back. A set provides a collection of distinct elements (no duplication); a set also provides an efficient determination of whether or not an element is a member. A map provides an efficient association between domain elements and range elements. The class directory **1334** specifies a member datum file **1350**, which is a set of references to instances of the file **1332**.

[0177] Member functions may also be specified. The member function path **1348**, from the class file **1332**, specifies a member function returning a textual value. A member function is characterized by a return type and an argument list (which may be empty, as for the path **1348**). The arguments, like the return value, are typed. Following the arguments, optional predicates may provide supplemental information about the member function, including qualifiers such as virtual and const, and even the definition (implementation) of the member function.

4.3 Predicates

[0178] The specification of the member datum files **1350** is augmented by a predicate which qualifies the files **1350** as a meron. The meron qualifier (from meronym, part of a larger whole) indicates that the files **1350** should be considered a part relative to a whole represented by the containing instance of the directory **1334**. The meron relation indicates a particularly close relationship between the containing object and the contained member datum; the relation may indicate such significant consequences as memory management, implicit traversal, deep versus shallow copy, etc.

[0179] The meron predicate on the files **1350** illustrates a particularly simple predicate. In general, predicates provide supplemental information about the various module entities (classes, members, modules, etc.). Predicates are analogous to attributes in XML or HTML but there are syntactic and semantic differences. Predicates should be interpreted as combining with entities to form synthetic sentences. An entity (such as the member datum files **1350**) provides the subject of the synthetic sentence. The predicate provides a “verb” and, optionally one or more complements. Complements are often denoted objects, but the potential confusion with the objects of object-oriented programming favors a distinct term. The predicate verb, typically denoted a relation, need not be a lexical verb. Many predicate relations correspond to intransitive verbs, especially variations on “is” and “has.” Often the verb is implicit; for example, the meron predicate “virtual,” applied to the member function path **1348**, indicates the virtuality of the member function. “Virtual” is of course an adjective; more properly, the relation could be “is-virtual”, or an “is” relation could be combined with a “virtual” complement. However it seems most convenient to keep the relation atomic, and use the simple and familiar terminology.

[0180] Predicates may incorporate complements. Depending on the predicate relation, zero, one or several complements may be appropriate. For example, the virtual relation

requires no complement. Relations such as “purpose” or “term” may require a single complement. A relation such as “note” may combine with several complements. Relations lacking a complement are denoted qualifiers. Relations accepting a single complement are denoted singletons. Relations accepting several complements are denoted pluralities. **[0181]** In the specification language, predicates are delimited by square brackets, defining a predicate scope. Within a predicate scope, one or more predicates may be present. A predicate is separated from a successor predicate by a semicolon. Each predicate consists of a relation and, optionally, one or more complements. A complement is separated from a successor complement by a comma.

[0182] Some important relations include virtual, const, and meron. The virtual relation, a qualifier, indicates the virtuality of a member function. A virtual member function is specified by a genus class subject to specialization by a species class. Virtuality is an extremely useful capability in object-oriented programming. The use of virtual functions permits diverse specializations to be generically driven, effectively decoupling the driver from the specializations. In object-oriented jargon, virtuality is a technique for obtaining polymorphism, which is access to diverse behavior under a common interface. The const relation, a qualifier, indicates that the operand to which it is applied is not subject to any change of state. The const qualifier may be applied to a member function or an argument of a member function. The meron qualifier, applied to a member datum, indicates the part/whole relationship standing between the member datum and its containing instance.

4.4 Host Specification

[0183] The classes so far considered have specified representations of entities that are relevant to the media-scanner application: files, directories, etc. The specified classes may be instantiated to provide objects (instances), each of which represents a particular entity from the application domain: a particular file, a particular directory, etc. A single class may be used to instantiate an indefinite number of objects; the details of the individual instantiations are determined by the context in which the application runs (i.e. the particular file system directories which are scanned). When objects are instantiated to represent entities, and associations between entities are represented by assignment to object members, an application-specific object-oriented data structure is constructed. This data structure in its entirety represents the specific context in which the application is operating. The processing which is performed by the application may be simplified by presenting the entire application-specific data structure in a unitary element, of which there is exactly one per application. This unitary element is denoted a host, since it serves the entire application-specific object-oriented data structure.

[0184] In the media scanner application, a class host **1352** fulfils the duties of the host. The module generator provides the host **1352** according to the specification. Members specified in the module scope are provided in the host. For the media scanner, those members include a member datum root-files **1354**. The application is directed to scan one or more top-level files; these are recursively scanned to identify media files and generate an HTML presentation. The top-level files which initiate the scan are collected in the root-files **1354**. The collected top-level files are a natural starting point for top-down processing. In more sophisti-

cated applications, a generated host may provide random access to entities, typically via a textual identifier. A host may also present entities organized by class in some applications.

[0185] The module generator provides a host class upon request. The host class in turn may be instantiated to provide a host instance. Unlike classes specified in the module scope, however, only a single instance of the host is typically instantiated in an application. The single host instance provides convenient access to the multitude of entity instances that characterize the application context.

4.5 Syntax Summary

[0186] All of the principal elements of the module generator's specification language have been introduced. To recap, at the top level a module is specified by a name, optional predicates, and a scope delimited by curly brackets. Within the module scope, classes and host members are specified. A class specification consists of a name, optional predicates, and a scope delimited by curly brackets. Within a class scope, member and class specifications may appear. Member specifications (including host member specifications in the module scope) include specifications for member data and member functions. A member datum is specified by a type, a name, optional predicates, and a terminal semicolon. A member function is specified by a type, a name, an argument list, optional predicates, and a terminal semicolon. Types range over values, references, and collections. Values include text, integer, bit, etc. References indicate instances of specified classes. Compound types include set, sequence, and map. Compound types further indicate one or more constituent types. Predicates specify supplemental specifications for entities including modules, classes, and members. Predicates are delimited by square brackets; individual predicates are separated by a semicolon. Each predicate includes a textual relation and optional textual complements. Plural complements are separated by a comma. Shell-style comments are also permitted; the hash-mark (octothorpe) indicates a comment which continues to the end of a line.

[0187] Refer to FIG. 36. A module media-scanner 1330 represents media files arranged in a file system. The media-scanner 1330 includes the following classes. A class file 1332 represents a file in a file system, including regular files and directories. The file 1332 has no genera. A class directory 1334 represents a file system directory, potentially containing files, some of which may themselves be directories. The directory 1334 specializes the file 1332. A class top-directory 1336 represents a topmost directory from which a scan has been initiated. The top-directory 1336 specializes the directory 1334. A class regular-file 1338 represents a regular file, i.e. a file which is not a directory. The regular-file 1338 specializes the file 1332. A class audio-file 1340 represents an audio file. The audio-file 1340 specializes the regular-file 1338. A class video-file 1342 represents a video file. The video-file 1342 specializes the regular-file 1338.

[0188] Refer to FIG. 37. The module media-scanner 1330 represents media files arranged in a file system. A class host 1352 represents an instantiation of the module. The media-scanner 1330 includes the following operator classes. A class viewer 1356 provides a base class for systematic

read-only processing of instantiations of the module. A class factory 1358 constructs instances of module classes in response to textual tags.

4.6 Host

[0189] Refer to FIG. 37. The class host 1352 represents an instantiation of the module. The host 1352 includes the following members: a member datum root-files 1354.

[0190] The member datum root-files 1354 provides a set of instances of the file 1332. The root-files 1354 collects files from which the specified scan is initiated. The root-files 1354 is a meronym of the host 1352.

4.7 File

[0191] Refer to FIG. 37. The class file 1332 represents a file in a file system, including regular files and directories. The file 1332 has no genera; it is a root class of the media-scanner 1330. The file 1332 is specialized by the directory 1334. The file 1332 is specialized by the regular-file 1338. The file 1332 includes the following members: a member datum parent 1344, a member datum name 1346, and a member function path 1348.

[0192] The member datum parent 1344 provides an instance of the directory 1334. The parent 1344 represents the directory containing a particular file.

[0193] The member datum name 1346 provides a text value. The name 1346 represents the name of a particular file in its containing directory.

[0194] The member function path 1348 returns a text value. The path 1348 provides the full path to a particular file. The path 1348 is virtual. The path 1348 is const.

4.8 Directory

[0195] Refer to FIG. 37. The class directory 1334 represents a file system directory, potentially containing files, some of which may themselves be directories. The directory 1334 specializes the file 1332. The directory 1334 is also known as a folder. The directory 1334 is specialized by the top-directory 1336. The directory 1334 includes the following members: a member datum files 1350 and a member function accept 1360.

[0196] The member datum files 1350 provides a set of instances of the file 1332. The files 1350 collects representations of files contained in the directory. The files 1350 is a meronym of the directory 1334.

[0197] The member function accept 1360 returns a bit value. The accept 1360 receives a file representation for inclusion in the directory. The accept 1360 accumulates files the the files 1350; also sets the file's parent 1344 to the accepting directory.

4.9 Top Directory

[0198] Refer to FIG. 37. The class top-directory 1336 represents a topmost directory from which a scan has been initiated. The top-directory 1336 specializes the directory 1334. The top-directory 1336 has an empty parent 1344. The top-directory 1336 includes the following members: a member function path 1362.

[0199] The member function path 1362 returns a text value. The path 1362 provides the full path to a particular file. The path 1362 is virtual. The path 1362 is const. The

path **1362** is specialized since the the parent **1344** is empty; the name **1346** contains the full path.

4.10 Regular File

[0200] Refer to FIG. 37. The class regular-file **1338** represents a regular file, i.e. a file which is not a directory. The regular-file **1338** specializes the file **1332**. The regular-file **1338** is specialized by the audio-file **1340**. The regular-file **1338** is specialized by the video-file **1342**. The regular-file **1338** does not specify any members.

4.11 Audio File

[0201] Refer to FIG. 37. The class audio-file **1340** represents an audio file. The audio-file **1340** specializes the regular-file **1338**. The audio-file **1340** does not specify any members.

4.12 Video File

[0202] Refer to FIG. 37. The class video-file **1342** represents a video file. The video-file **1342** specializes the regular-file **1338**. The video-file **1342** does not specify any members.

4.13 Media Scanner Module Products

[0203] The products of the module generator include various classes from the specification. There are many product details but these are not particularly difficult when the general approach to the products is evident. Two broad categories of products are provided by the generator: documentation products and code products. Consideration of documentation products is deferred. Code products may be conveniently divided into two categories: entity-level classes, and module-level classes. The entity-level classes include classes specified at or below the module scope in expressions in the module-specification language. For the media scanner, these are classes like the file **1332**, the directory **1334**, etc. Entity-level classes are typically representative of entities in the application domain. Thus, a media scanner represents files and directories.

[0204] Module-level classes represent elements that are common across application domains. Such elements in the media scanner include the host **1352**, the viewer **1356**, and the factory **1358**. Any application might benefit from host, viewer, and factory classes. Of course, these classes may be highly customized according to the particulars of the application domain entities corresponding to entity-level class specifications (e.g. files and directories). However the “roles” of host, viewer, and factory are common to many application domains.

[0205] In a typical application, instances of the entity-level classes proliferate in accordance with the application context (e.g. input files). Instances of entity-level classes are typically created dynamically in correspondence with elements of input data. In contrast, module-level classes typically occur in individuals in a given application. A single host is typical; likewise a single factory. One or a few viewers are typical, each corresponding to particular products. The module-level constituency is determined at com-

pile time; the entity-level instances can only be determined at run time in accordance with the particular data that defines the application context.

4.13.1 Module-Scoped File Product Class

[0206] Refer to FIG. 38. Recall that two member data were specified for the class file **1332**: the parent **1344**, an instance of the directory **1334**, and the name **1346**, an instance of text. Declarations for these members are found in the product class. The members are declared private, in keeping with standard object-oriented practice. Access to the members is mediated by various member functions, as shown. Note that the parent **1344** is declared a pointer; reference instances are implemented as pointers. By contrast, the name **1346** is simply a text value. A declaration for the specified member function path **1348** is also shown.

[0207] A generated member function mediates dispatch to an instance of the viewer **1356**. This virtual dispatch permits a generic dispatch to a genus instance (e.g. an instance of the file **1332**) to be automatically specialized to a view of particular species (e.g. an instance of the directory **1334**).

[0208] Refer to FIG. 39. Since the specification has requested the viewer **1356**, the virtual dispatch member function was generated, as shown. The viewer **1356** provides a view member function for each entity-level class; each entity-level class provides a viewer dispatch member function, which specializes any generic viewer member functions, e.g., that of the file **1332**, as depicted. Each viewer dispatch invokes the particular view member function of the viewer **1356**. This permits a client’s invocation of the generic dispatch to invoke the appropriate specific view in the viewer **1356**. This is a useful idiom which will be demonstrated in the application code below. The idiom is closely related to the “visitor pattern,” popularized by Gamma et. al, “Design Patterns”, Addison-Wesley (1995), ISBN 0-201-63361-2, pp. 331-344.

4.13.2 Module-Level Host Product Class

[0209] Refer to FIG. 40. Recall that one member was specified in module scope and thus for incorporation into the generated host: the member datum root-files **1354**, a set of instances of the file **1332**. Additional member data are also provided: an instance of the factory **1358** and an instance of a logger. Note that access to the root-files **1354** is provided by reference; various iterators for the collection are also provided. A constructor and destructor are provided. The destructor deletes the constituents of the root-files **1354**, due to the specification of the root-files **1354** as a meron. The copy constructor and assignment operator are declared private to indicate that copy and assignment of a host instance is prohibited. Typically a single host instance is provided in an application. Host instances are typically passed by reference.

4.13.3 Module-Level Viewer Product Class

[0210] Refer to FIG. 41. The class viewer **1356** provides a handy base class for processors that use variations on the “visitor” pattern. The viewer **1356** provides a distinct view method for each entity-level target class. By default, these methods recursively view any meron member data of the target class, then apply the appropriate view-base method for each immediate genus of the target class. The boolean value returned reflects the successful processing of each meron

and each genus, or simply true if there are no merons or genera. For convenience, a view-aggregate member function is provided for relevant collections; these return success according to the success of viewing each constituent of the aggregate.

[0211] Refer to FIG. 42. Implementations for some of the member functions are shown. An instance of the file 1332 lacks any meron members, so it simply invokes the view-base, which, in turn, returns boolean success, as the file 1332 lacks genera. The aggregate viewer of a file-set invokes an aggregate viewer on a view iterator. The aggregate viewer for the view iterator invokes the viewer dispatch for each constituent; depending on the particular species, a particular view method of the viewer 1356 will be dispatched. In the particular view member function for instances of the directory 1334, an aggregate view is invoked for the meron member datum files 1350. The view-base for the directory 1334 is then invoked, which in turn invokes a view for the genus file 1332.

[0212] The viewer 1356 itself doesn't do any actual work but it does provide a useful traversal framework which is conveniently compartmentalized. A typical viewer specifies the viewer 1356 as a genus, then specializes one or more of the view methods to perform useful work. Typically the useful work may include of some sort of accumulation or output production related to the particular elements that are encountered in the traversal. An example is the HTML writer class, described below.

4.13.4 Module-Level Factory Product Class

[0213] Refer to FIG. 43. The class factory 1358 provides construction of instances of entity-level classes in response to textual tags. The class file 1332 was designated as the factory root; the factory 1358 provides instances constructed from the closure of the species of the file 1332 (i.e. species, species of species, etc.). A member function instantiate 1364 provides the construction. A textual tag is supplied to the member function, and an instance of the file 1332 is returned, unless the tag is unrecognized, in which case a zero pointer indicates failure.

[0214] The file 1332 defines static instantiator functions for each target class; these simply invoke the appropriate constructor and return the constructed element. However the returned element is "genericized" to the factory root, the file. 1332. This is a valid operation since any instance of a species class is also an instance of a corresponding genus class.

[0215] A map member is defined which associates the instantiators to textual tags. The map is initialized in the constructor 1366. The map is used in the instantiate 1364 to obtain a static instantiator from the supplied textual tag. The static instantiator, if found, is invoked to obtain an instance of the file 1332.

4.14 Media Scanner Application

[0216] The module generator has done its work; the module specification has been processed to provide product classes. To get a complete application, however, additional components are required. A class builder 1368 traverses the file system; the builder 1368 will construct an application-specific data structure consisting of interlinked specializations of the file 1332. The data structure will reside in an instance of the host 1352. The builder 1368 will make use of

the factory 1358. A class writer 1370 produces the HTML product. The writer 1370 processes a host instantiation. A command-line application 1372 brings together the builder 1368, host 1352, and writer 1370.

4.14.1 Builder

[0217] Refer to FIG. 44. The class builder 1368 recursively scans the file system, starting from a specified file. Most of the nitty-gritty work is performed by a base class file-walker 1374; the file-walker 1374 delivers notifications via virtual member functions, which are specialized by the builder 1368. The file-walker 1374 is an adaptation based on W. Richard Stevens, "Advanced Programming in the Unix Environment", Addison-Wesley (1992), ISBN 0-201-56317-7, pp. 108-111. Stevens' implementation in turn follows closely the Unix library function nftw. The file-walker 1374 will not be considered in detail. Note, however, that the file-walker 1374 provides a member function visit 1376 which initiates a recursive scan starting from the path specified by its textual argument.

[0218] An instance of the builder 1368 is provided with an instance of the host 1352 at construction; the notifications of files are translated to operations on the supplied host and its constituents.

[0219] The builder 1368 provides responders which are responsive to notifications from the base class, corresponding to events in the file-system traversal. The responders are member functions, specialized from their generic definitions in the base class: a member function root-dir-open 1378, a member function root-dir-close 1380, a member function dir-open 1382, a member function dir-close 1384, and a member function regular-file 1386. These member functions will be considered in detail below. An instance of the builder 1368 maintains a member stack of instances of the directory 1334, the directory stack, corresponding to directories which have been entered but not yet exited. An instance of the builder 1368 also maintains a PCRE regular expression which is used to compute file names and extensions from supplied paths. The PCRE (Perl-Compatible Regular Expression) library is widely used for text processing in C and C++ programs; documentation is readily available in Unix distributions and online (cf. <http://www.pcre.org/>).

[0220] Refer to FIG. 45. The member function root-dir-open 1378 is invoked upon entering a root directory (i.e. a directory specified in an invocation of the visit 1376). An instance of the top-directory 1336 is created, named, provided to the host, and pushed onto the stack. The complementary member function root-dir-close 1380 (not shown) is invoked upon exiting a root directory. The stack is popped.

[0221] The member function dir-open 1382 is invoked upon entering a non-root directory. An instance of the directory 1334 is created, named, provided to the topmost directory on the stack, and pushed onto the stack. The complementary member function dir-close 1384 (not shown) is invoked upon exiting a non-root directory. The directory stack is popped.

[0222] The member function regular-file 1386 is invoked upon encountering a regular file (i.e. a file which is not a directory). The name of the regular file is processed by execution of the regular expression to obtain a file extension. The file extension is supplied to the instantiate 1364; an instance of the file 1332 is returned if the extension is

recognized. If a file instance is returned, it's named and provided to the topmost directory on the stack.

4.14.2 Writer

[0223] The writer **1370** is necessarily burdened with various details that are germane to the generation of a family of interlinked HTML files and directories. Most of these details are unrelated to this demonstration so a cursory description will suffice. A class writer **1370**, specializing the viewer **1356**, processes an instance of the host **1352** to generate interlinked HTML pages and directories. A class page **1388** represents individual HTML pages in the output.

[0224] Refer to FIG. 46. The class page **1388** represents an HTML page consisting of links to audio, video, and directory pages. Audio, video, and page instances are accumulated. An instance of the page **1388** is specified by a path and a name, indicated where the HTML file shall be written. A write method provides actual HTML, including links to parent and child pages, as well as links to video and audio files.

[0225] Refer to FIG. 47. The class writer **1370** specializes the viewer **1356**. An instance of the writer **1370** is supplied with an instance of the host **1352** and a textual target directory on construction. The writer **1370** provides view methods for the top-directory **1336**, the directory **1334**, the audio-file **1340**, and the video-file **1342**. The writer **1370** maintains a stack of instances of the page **1388**, each of which corresponds to a scanned file system directory which has been entered but not yet exited. An instance of the page **1388** provides a presentation of a file-system directory. A top-level index page is also generated, collecting all of the top-level directories from which scans were initiated.

[0226] Refer to FIG. 48. A dir-page member function captures the processing requirements common to instances of the directory **1334**, including its specialization the top-directory **1336**. The instance of the directory **1334** is presented in a corresponding instance of the page **1388**. A directory is created in the file system if it doesn't already exist. The constituents of the supplied instance of the directory **1334** are recursively visited, in sorted order. The corresponding instance of the page **1388** is written. The page instance is accumulated to topmost stack page.

[0227] Refer to FIG. 48. The specialized view member functions for instances of the top-directory **1336** and the directory **1334** are shown. These member functions specialize the corresponding view member functions of the viewer **1356**. The specialized member functions invoke distinct constructors for an instance of the page **1388**, corresponding to slightly different requirements for top-level and other directories. Then presentation is delegated to the dir-page member function described above.

[0228] Refer to FIG. 48. An aggregate viewer member function is shown, as required by the dir-page member function. The aggregate viewer simply traverses the collection and invokes the generic viewer dispatch. This will result in dispatch to the appropriate specialized view. The specialized view for instances of the directory **1334** is described above. The specialized view for instances of the audio-file **1340** and the video-file **1342** are shown below.

[0229] Refer to FIG. 49. The specialized view for instances of the audio-file **1340** and the video-file **1342** are

shown. These simply accumulate themselves to the topmost instance of the page **1388** on the stack.

4.14.3 Main Program

[0230] Refer to FIG. 50. The command-line application **1372** is shown. A target directory is plucked from the end of the command line. An instance of the host **1352** is constructed. An instance of the builder **1368** is constructed, initialized with the host instance. Each remaining command-line argument specifies a top-level directory from which to scan; the scans are initiated by invocation of the member function visit **1376**. The host instance is populated in the course of the scans.

[0231] If the scans have succeeded, an instance of the writer **1370** is constructed, initialized with the host instance and the target directory. The writer instance performs its traversal from the constructor, so there is no further action required. The interlinked HTML files and any required directories are generated below the target directory.

5 Module Processors

[0232] Various processors are provided to realize value from the meta-module **1016**. The processors may be divided into two broad collections. Processors which write programming language code for compilation, linking, and execution are designated as elements of the code-generator **1012**. Processors which write documentation for formatting to presentation-oriented media such as HTML or PDF are designated as elements of the document-generator **1014**.

5.1 Code Generators

[0233] Refer to FIG. 51. The elements of the code-generator **1012** write programming language code for compilation, linking, and execution. A generator forwards-writer **1390** provides forward-declarations **1392** and typedefs for use by processors and other components. A generator classes-writer **1394** provides class-definitions **1396** and implementations of member functions for constituent classes of a module. A generator viewer-writer **1398** defines a base class viewer **1400** which provides useful default behavior for specialized processors which provide read-only processing of an application-specific data structure representing an instantiation of a module. A generator editor-writer **1402** defines a base class editor **1404** which provides useful default behavior for specialized processors which modify an application-specific data structure representing an instantiation of a module. A generator acceptors-writer **1406** defines acceptors **1408**, including classes which provide a facility for type-safe processing of generic elements (typically from markup processing or synthetic-language parsing) to specific elements suitable for accumulation as member data in an application-specific data structure. A generator predictors-writer **1410** defines predictor definitions **1412**, including classes which provide a facility for type-safe processing of generic attributes (typically from markup processing or synthetic-language parsing) to specific elements suitable for accumulation as member data in an application-specific data structure. A generator factory-writer **1414** defines a class factory **1416**, which provides type-safe instantiation of specific elements according to textual tags such as are obtained in markup processing or synthetic-language parsing. A generator host-writer **1418** defines a class host **1420**, which represents an instantiation

of a module. An instantiation of a module is an application-specific data structure, the elements of which are instances of the classes which are the constituents of a module. A generator reflector-writer **1422** defines a class reflector **1424**, which provides run-time representations of genera and species relationships among classes. A generator auditor-writer **1426** defines a class auditor **1428**, which provides verification of specified characteristics of an instantiation of a module.

5.1.1 Forwards Writer

[0234] Refer to FIG. **52**, which depicts excerpts of the output of the forwards-writer **1390** operating on the media-scanner **1330**. The generator forwards-writer **1390** processes an instance of the module **1028** to generate includes **1430**, forward-declarations **1392**, module-services **1432**, and typedefs **1434** for use by module processors and other components. The includes **1430** provide include directives for the template classes which underly compound types which are used by the specified module. The forward-declarations **1392** provide a forward class declaration for each instance of the class **1036**. The module-services **1432** provide forward class declarations for module-level processors according to the module specification. The typedefs **1434** provide convenient type definition for compound types which are used in the module.

[0235] The forwards-writer **1390** processes an instance of the module **1028**. The root-classes **1132** are visited; for each visited class, an element of the forward-declarations **1392** is generated. The members **1038** of the class are visited; the members in turn dispatch visits to their associated types, including the type **1226**, and, for member functions, the type **1226** for each element of the arguments **1050**. Each visited type may contribute an element to the typedefs **1434** and an element to the includes **1430**. The typedefs **1434** and includes **1430** are represented by sets in the forwards-writer **1390** so duplicate typedefs and includes are suppressed. The module-services **1432** are generated according to the specified module-level elements of the supplied instance of the module **1028**.

5.1.2 Classes Writer

[0236] Refer to FIG. **53**, which depicts excerpts of output from the classes-writer **1394**. The generator classes-writer **1394** provides class-definitions **1396** and member-function-definitions **1436** for constituent classes of a module.

[0237] The classes-writer **1394** processes an instance of the module **1028**. The classes **1030** are visited; for each visited class, a class definition is accumulated to the class-definitions **1396** and member function definitions are accumulated to the member-function-definitions **1436**. The class definition incorporates the instance of the genera **1176**, if any, as public base classes. The members **1038** of each class are visited to generate elements of the class definition and member function definitions. For each instance of the member-datum **1052**, a member definition is accumulated to a collection of member-datum-definitions **1438**. Member function definitions are accumulated to collections of view-member-access **1440**, edit-member-access **1442**, reset-member-access **1444**, and uniform-member-acceptors **1446**. Additional member function definitions are accumulated for compound member datum; these are accumulated to compound-member-viewers **1448** and compound-member-edi-

tors **1450**. Where necessary, private access to member data is provided (e.g., where access to member data is limited by an acceptor **1260**), including friend declarations, as necessary (e.g., where an acceptor **1260** is from a distinct class). Where necessary, constructor initialization is provided for member data.

[0238] Where instances of the member-function **1048** are specified, declarations are accumulated to specified-member-functions **1452**. If inline or other definitions of the member functions are specified, they are accumulated in the specified-member-functions **1452** or in the member-function-definitions **1436**.

[0239] If the auditor-id **1144** is specified, an audit member function declaration is provided in the class definition, and a definition is provided which incorporates any specified audit-requirements **1210**. If markup processing is specified, member function declarations are provided as specified.

[0240] If the viewer-id **1136** is specified, a viewer-dispatch **1454** is declared and defined. If the editor-id **1138** is specified, an editor dispatch is declared and defined. If the predicator-id **1158** is specified, dispatch to the generated predicator and the generated promissary reference is declared and defined. If the acceptor-id **1156** is specified, dispatch to the generated acceptor is declared and defined. If the factory-id **1140** is specified, requests for acceptor and predicators are declared and defined.

[0241] A reflector-interface **1456** is provided for class identification at run-time. A constructor and destructor are provided in a factory **1458**. The constructor incorporates any required initialization of member data. The destructor incorporates any required deletion of meron-specified member data.

5.1.3 Viewer Writer

[0242] Refer to FIG. **54**, which depicts output excerpts for the viewer-writer **1398**. The generator viewer-writer **1398** defines a class viewer **1400** which provides useful default behavior for specialized processors which provide read-only processing of an application-specific data structure representing an instantiation of a module.

[0243] The viewer-writer **1398** processes an instance of the module **1028**. The viewer-writer **1398** visits each instance of the classes **1030**. For each visited class, a virtual view responder is generated, which is accumulated to view-members **1460**. A view-base responder is generated, a declaration of which is accumulated to view-base-members **1462**. A view-agg responder is generated, each unique declaration being accumulated to the view-agg-members **1464**.

[0244] Refer to FIG. **55**, which depicts additional excerpts of code generated by the viewer-writer **1398**. For each visited class, the generated element of the view-members **1460** recursively dispatches views to meron members and to the corresponding generated element of the view-base-members **1462**. The generated element of the view-base-members **1462** dispatches to the genera of the class. Any generated element of the view-agg-members **1464** dispatches to each contained instance in the compound datum.

5.1.4 Editor Writer

[0245] The processor editor-writer **1402** defines a class editor **1404**, which provides useful default behavior for specialized processors which modify an application-specific

data structure representing an instantiation of a module. The editor **1404** generated by the editor-writer **1402** is structurally similar to the class viewer **1400** generated by the viewer-writer **1398**, however the view operations are replaced by edit operations, and the instance arguments are not const, since the editor is enabled to make changes to the data structure.

5.1.5 Acceptors Writer

[0246] The generator acceptors-writer **1406** defines acceptors **1408** which provide a facility for type-safe processing of generic elements (typically from markup processing or synthetic-language parsing) to specific elements suitable for accumulation as member data in an application-specific data structure. The acceptors **1408** include a class base-acceptor **1466**, a collection of classes specialized-acceptors **1468**, and a collection of classes acceptor-hosts **1470**.

[0247] Refer to FIG. **56**, which depicts part of a module specification, including a specification of an acceptor. A module **1472** specifies an acceptor **1474**. The module **1472** includes a class element **1476**, a class item **1478**, and a class channel **1480**. The channel **1480** includes a member datum items **1482**, a sequence of instances of the item **1478**.

[0248] The base-acceptor **1466** defines a collection of virtual accept methods, each of which corresponds to a particular module class. When an instance of the module **1028** specifies an acceptor via the acceptor-id **1156**, the classes-writer **1394** generates, for each particular module class, a dispatch to the base-acceptor **1466**, which in turn invokes the particular accept method corresponding to the particular module class.

[0249] Refer to FIG. **57**, which depicts excerpts of the code generated by the acceptors-writer **1406**. The acceptors-writer **1406** generates the acceptor **1474**, a base-acceptor **1466**, which includes an accept virtual member function for each class in the module.

[0250] Refer to FIG. **58**, which depicts the implementations of the virtual accept member functions generated by the acceptors-writer **1406** for the class acceptor **1474**. The acceptors-writer **1406** provides an implementation for each accept member function which delegates acceptance to each genus of the argument class, if any. If no genus implementation accepts the argument, the accept fails.

[0251] Each specialized acceptor class of the collection specialized-acceptors **1468** corresponds to a particular member datum which is capable of accepting a reference datum. Acceptance capability may be inhibited when direct assignment to the datum is restricted via the inhibit-predicator **1262**. In the exemplary embodiment, acceptance capability is provided for member data for which the type **1226** is referential, including the reference-type **1068**, the reference-sequence-type **1076**, and the reference-set-type **1082**. In an alternate embodiment, acceptance could be generalized to scalar member data, in which the textual content of the markup elements would serve as the basis for scanning to binary scalar values.

[0252] Each specialized acceptor class specializes the base-acceptor **1466**. On instantiation, an instance of the specialized acceptor class is supplied with a target instance of the class for which the particular member datum was specified; the target instance is reserved as a private member of the specialized acceptor class. Each specialized acceptor class specializes the particular accept method corresponding to the acceptance type of the member; for a reference-type

1068, the acceptance type corresponds to the reference-class-id **1284**. For compound types, the acceptance type corresponds to the reference-range **1302** or the reference-range **1308**. The specialized accept method is supplied with an instance corresponding to the acceptance type; this instance is then assigned to the particular member datum of the reserved target instance.

[0253] Refer to FIG. **59**, which depicts a specialized acceptor class generated by the acceptors-writer **1406**. The specialized acceptor class, an element of the specialized-acceptors **1468**, corresponds to the member datum items **1482**. The acceptors-writer **1406** generates a specialization of the acceptor **1474** for each suitable member datum of each particular class of the module. For the member datum items **1482**, a class channel-items-acceptor **1484** is generated by the acceptor **1474**. The channel-items-acceptor **1484** is initialized with an instance of the channel **1480**, which provides the target to which instances of the item **1478** may accumulate. The channel-items-acceptor **1484** specializes the virtual accept member function of the acceptor **1474** for the item **1478**, corresponding to the acceptance of an instance of the item **1478** directed to the member datum items **1482** for the target instance of the channel **1480**. The specialized accept member function invokes an acceptance member function of the channel **1480** (which is generated by the classes-writer **1394**).

[0254] Each acceptor host class of the collection acceptor-hosts **1470** provides a mapping from textual tags to acceptors, as well as instantiation services mapping textual tags to module class instances. In a markup processing context, a generic element may be presented for acceptance in association with a textual tag. Moreover, a textual tag may need to be related to a member to determine the proper specialized instantiation of an instance which is to correspond to the textual tag. An acceptor host class performs these two functions: instantiate a specialized element in response to a textual tag in the context of a containing instance, and accept a generalized element corresponding to a textual tag and ensure that the generalized element is properly specialized for assignment to a member datum corresponding to the textual tag.

[0255] Refer to FIG. **60**, which depicts an acceptor-hosts **1470**, generated by the acceptors-writer **1406**. A class channel-acceptor-host **1486**, generated by the acceptors-writer **1406**, provides an acceptor host class for the class channel **1480**. The channel-acceptor-host **1486** includes an acceptor member function, which provides an instance of the acceptor **1474** in response to an instance of the channel **1480** and a textual tag. The textual tag specifies a particular member datum of the channel **1480**. The channel-acceptor-host **1486** includes a member function instantiate **1488**, which, in response to a textual tag, instantiates an appropriate instance for the member datum corresponding to the supplied tag. The channel-acceptor-host **1486** includes a member function acceptor **1490**, which, in response to a target instance of the channel **1480** and a textual tag, provides an instance of the acceptor **1474**, suitable for assignment to the target instance of the member datum corresponding to the supplied textual tag.

[0256] The channel-acceptor-host **1486** includes two static member functions (class functions), respectively providing instantiation of an instance of the channel-items-acceptor **1484** and instantiation of an instance of the item **1478**. The

channel-acceptor-host **1486** defines two index maps, respectively mapping from textual tags corresponding to member data to class functions.

[0257] Refer to FIG. 61, which depicts the implementations of member functions for the channel-acceptor-host **1486**, generated by the acceptors-writer **1406**. A constructor provides initialization of the index maps which associate textual tags with class functions providing acceptors and instantiators, respectively. The sole member datum for the channel **1480** is the items **1482**, so there is only one initialization per table. More generally, where there are multiple member data, there are several initializations for each table.

[0258] The generated implementation of the member function acceptor **1490** is also shown in FIG. 61. An acceptor provider is sought from the acceptor index map, corresponding to the supplied tag. If an acceptor provider is obtained, it is invoked with the supplied target instance of the channel **1480**. Otherwise a zero pointer is returned to indicate failure.

[0259] The generated implementation of the member function instantiate **1488** is also shown in FIG. 61. An instantiator is sought from the instantiator index map, corresponding to the supplied tag. If an instantiator is obtained, it is invoked. Otherwise a zero pointer is returned to indicate failure.

[0260] Refer to FIG. 62, which illustrates some excerpts of the class element **1476** and the class channel **1480**.- The element **1476** includes an accept-element member function, which is provided with a textual tag and an instance of the element **1476**. The accept-element member function is not generated; it must be provided by the developer. The accept-element member function is considered below.

[0261] The element **1476** further includes generated virtual member functions for dispatching to an acceptor and for requesting an acceptor. The channel **1480** specializes those dispatch methods, dispatching them to the supplied factory instance, which will be considered below. The channel **1480** also provides the accept member function which accumulates a supplied instance of the item **1478** to the items **1482**.

[0262] Refer to FIG. 63, which depicts the accept-element member function, which is not generated but must be provided by the developer. The member function requests an instance of the acceptor **1474**, which, if obtained, is dispatched to the element which is a candidate for acceptance. If the dispatch succeeds, the element was accepted. Note that this general mechanism uses generic classes such as the element **1476** and the acceptor **1474**. Specific situations such as an instance of the item **1478** provided to an instance of the channel **1480** using the tag "item" will be correctly handled by this mechanism, without any need for casting or switching. Moreover, the addition of new members and tags and even new module classes does not require any additional coding by the developer; the generated code will expand to permit this generic mechanism to handle the specific situations.

5.1.6 Predicators Writer

[0263] The processor predicators-writer **1410** provides predicator definitions **1412** which collectively provide a facility for type-safe processing of textual attributes or predicates (typically from markup processing or synthetic-language parsing) to specific elements suitable for accumulation as member data in an application-specific data struc-

ture. The predicators-writer **1410** processes an instance of the module **1028**, visiting contained instances of the class **1036**, the member-datum **1052**, and associated instances of the type **1054**. A predicate relation specifies a textual tag which may correspond to a textual element from the tags **1264** of an instance of the member-datum **1052**. The predicate complements may specify the value or instance to be assigned to the corresponding member datum. A particular textual tag may occur in more than one instance of the member-datum **1052**; this is acceptable if the classes that specify the member data corresponding to the shared tag are distinct.

[0264] There are three distinct cases for processing by the predicators-writer **1410**, according to the specifics of the member datum to which the predicate or attribute is directed. The simplest case is scalar member data, where the type **1226** corresponds to the value-type **1058**, the value-sequence-type **1074**, and the value-set-type **1080**. In this case, textual data may require scanning to a binary value, followed by assignment to a particular member datum. In the second case, corresponding to meron member data, with the type **1226** corresponding to the reference-type **1068**, the reference-sequence-type **1076**, and the reference-set-type **1082**, an instance of the specified type is instantiated, an identifier is assigned as necessary, and the newly instantiated element is assigned to the particular member datum. In the third case, corresponding to non-meron member data with the type **1226** corresponding to the reference-type **1068**, the reference-sequence-type **1076**, and the reference-set-type **1082**, any textual complement is assumed to refer to an identifier corresponding to an instance of the correct type. However the reference instance may not yet be instantiated, so a promissary reference is created, in which the resolution of the reference is deferred. At a later time, typically when parsing or markup processing is complete, promissary references are redeemed with resolution to instances, and member data is assigned.

[0265] The predicators-writer **1410** generates predicator base class definitions **1492**, which are classes that permit generic manipulation of textual data in the early phases of predicate processing. The predicators-writer **1410** generates generic predicator apply operations **1494**, which are virtual member functions of the base predicator of the predicator base class definitions **1492**. The generic predicator apply operations **1494** are invoked by specific target instances which are to receive a member assignment specified by a textual relation and optional complements. The predicators-writer **1410** generates predicator specializations **1496**, which are classes that specialize the predicator base class definitions **1492**. An element of the predicator specializations **1496** is generated for each unique occurrence of a particular tag from the tags **1264**. Each element of the predicator specializations **1496** includes one or more elements of a collection of specific predicator apply operations **1498**. Each element of the specific predicator apply operations **1498** is a member function corresponding to a particular class, where the instance of the class serves as a target to which a member datum is to be assigned. Each element of the specific predicator apply operations **1498** specializes an element of the generic predicator apply operations **1494**.

[0266] The predicators-writer **1410** also generates a promissary reference base class definition **1500**, a base class that permits generic manipulation of textual references, the resolution of which is deferred from the processing of the

attribute or predicate. The promissary reference base class definition **1500** includes a collection of generic promissary acceptor operations **1502**, each of which is a virtual member function, one per instance of the class **1036**, corresponding to the redemption of a promissary reference. The promissary reference base class definition **1500** is complemented by a collection of promissary reference definition **1504**, corresponding to each instance of the member-datum **1052**, as necessary. Each element of the promissary reference definition **1504** provides an element of a collection of specific promissary acceptor operations **1506**, each of which specializes one of the generic promissary acceptor operations **1502**, in which an instance corresponding to a resolved reference is accepted as member data.

[0267] Refer to FIG. **64**, which depicts excerpts from the class predicator **1508** and several specializations, collectively predicator base class definitions **1492**, generated by the processor predicators-writer **1410**. The predicator **1508** includes generic predicator apply operations **1494**, each of which is a virtual member function corresponding to a particular class of the module. Only a representative few of these are shown in the Fig. The virtual apply indicates the application of a predicate to a target element. Particular predicators specialize the predicator **1508** and specific predicator apply operations **1498**, which specialize the apply member function corresponding to the particular classes to which the predicates are applicable.

[0268] Predicators are characterized according to plurality of complements. The class predicator-qualifier **1510**, specializing the predicator **1508**, does not accept any complements. The class predicator-singleton **1512**, specializing the predicator **1508**, represents a predicate accepting a single complement. The class predicator-plurality **1514**, specializing the predicator **1508**, represents a predicate accepting multiple complements.

[0269] Refer to FIG. **65**, which depicts examples of predicator specializations **1496**. The simplest predicate application is illustrated by a class qualifier **1516**, which demonstrates a value predicator specialization **1518**. The particular example from the collection of specific predicator apply operations **1498** is provided by a value specific predicator apply operation **1520**, in which the boolean member datum is reset.

[0270] A class meron-predicator **1522** depicts the slightly more elaborate response to a meron reference predicate, which demonstrates an instantiating predicator specialization **1524**. In an instantiating specific predicator apply operation **1526**, another example of the specific predicator apply operations **1498**, an instance of the host-class **1040** is constructed, the identifier of the instance is set from the predicate complement, and the newly constructed instance is offered to the target, an instance of the module **1028**.

[0271] Refer to FIG. **66**, which depicts a generated class promissary-reference **1528**, exemplary of the promissary reference base class definition **1500**. The promissary-reference **1528** is initialized with a tag, identifier, and source, all which are textual. The tag represents the predicate relation. The identifier represents the reference element. The source provides additional information for reporting errors. The promissary-reference **1528** includes a member function promissary resolve operation **1530**, in which the host resolver is provided with the identifier, potentially obtaining a generic element. If an element is obtained, a resolution notification is dispatched to the element, which, if success-

ful, will result in the invocation of a properly specialized invocation of an accept member function. The promissary-reference **1528** includes a collection of generic promissary acceptor operations **1502**, each of which is a virtual accept member function corresponding to a class of the the module, of which only one particular member function is shown in the figure.

[0272] Refer to FIG. **67**, which depicts elements generated by the predicators-writer **1410** and other processors in support of promissary references. The generated class member-function **1048** includes a specialization of a promissary dispatch **1532**, to which it responds with an invocation of the corresponding element of the generic promissary acceptor operations **1502** of the promissary-reference **1528**. A suitably specialized virtual accept member function, an element of the specific promissary acceptor operations **1506**, is provided in the class promissary-reference **1534**, which specializes the promissary-reference **1528**. In the specialized accept member function, the supplied instance of the member-function **1048** is finally assigned to the target, in this case, the member datum acceptor **1260** of the class member-datum **1052**.

[0273] A class acceptor-singleton **1536**, specializing the predicator-singleton **1512**, provides a promissary predicator specialization **1538**. In the supplied element of the specific predicator apply operations **1498**, a promissary specific predicator apply operation **1540** is supplied. The target instance of the member-datum **1052** is used to instantiate a promissary-reference **1534**. Also supplied in the instantiation is a complement, which provides the identifier, for which resolution is deferred. The newly instantiated promissary reference is deposited in the host, where it will be held until resolution is initiated, presumably at the conclusion of parsing.

5.1.7 Factory Writer

[0274] The processor factory-writer **1414** processes an instance of the module **1028** to define a class factory **1416**, which provides type-safe instantiation of specific elements according to textual tags such as are obtained in markup processing or synthetic-language parsing.

[0275] Refer to FIG. **68**, which depicts an excerpt of the class factory **1542** generated by the factory-writer **1414**. The factory-writer **1414** is exemplary of the factory **1416**. A constructor is generated to provide initialization of the member data. Two instantiators **1544** are provided; one is context-independent, accepting a textual argument corresponding to the tag for a class in the module. The other instantate member function is context-sensitive. The context is provided by the supplied instance of the element **1476**. The supplied tag may then specify a member datum or a class.

[0276] The factory **1542** provides acceptors on request, corresponding to specific contexts; a specific context is provided by a species of the generic element **1476**. The provision of acceptors is mediated by a collection of acceptor-responders **1546** member functions, one for each particular instance of the class **1036** from the classes **1030**. The factory **1542** provides context-instantiator-responders **1548** on request, corresponding to specific contexts; a specific context is provided by a species of the generic element **1476**. A collection acceptor-host-members **1550** of members are provided, one for each particular instance of the class **1036** from the classes **1030**. The members correspond to the

acceptor-hosts **1470** generated by the acceptors-writer **1406**, of which the channel-acceptor-host **1486** is exemplary.

[0277] A collection of static-instantiators **1552** is provided, each of which provides instantiation for a particular instance of the class **1036** from the classes **1030**, except where the particular instance of the class **1036** corresponds to a pure abstract class. A pure abstract class defines or inherits without intervening specialization a pure virtual member function. An instantiator-map-member **1554** provides an association of elements of the static-instantiators **1552** to textual tags. The textual tags correspond to the tags **1206** of the particular instance of the class **1036** corresponding to the associated element of the static-instantiators **1552**.

[0278] Refer to FIG. 69, which depicts implementation of some member functions for the class factory **1542**, as generated by the factory-writer **1414**. The constructor uses a collection of instantiator-map-initializers **1556**, which collectively initialize the mapping from tags to elements of the static-instantiators **1552**. The context-independent instantiator of the instantiators **1544** maps the tag to an element of the static-instantiators **1552**, which, if obtained, is invoked. The context-sensitive instantiator of the instantiators **1544** dispatches a generic request for instantiation to the context element. The generic request is specialized in the particular class of the context element, resulting in invocation of a particular element of the context-instantiator-responders **1548**.

5.1.8 Host Writer

[0279] The processor host-writer **1418** processes an instance of the module **1028** to define the class host **1018**, which represents an instantiation of the processed module. An instantiation of a module is an application-specific object-oriented data structure, the elements of which are instances of the classes **1030** of the module instance. The host-writer **1418** may also generate definitions for support classes, including a resolver **1558** and a depository **1560**. The generated resolver **1558** provides an association between textual identifiers and instances. The generated depository **1560** caches and eventually redeems instances of the promissary reference base class definition **1500**.

[0280] Refer to FIG. 70, which depicts class definitions for a resolver **1558** and a depository **1560**, generated by the host-writer **1418**. The resolver **1558** is exemplified by generated class resolver **1562**, specializing the editor **1564**. The resolver **1562** provides an edit member function responsive to instances of the entity **1026**, which is specified as the resolver root, via the member datum resolver-root-id **1154**. The edit member function associates the value of the member datum id **1106** with the particular instance of the entity **1026**. The id **1106** is specified as the resolver identifier field, via the member datum resolver-id-field **1152**. The resolver **1562** provides const and non-const resolve methods for determining the associated instance of the entity **1026** for a particular identifier. The resolver **1562** includes an index member which maintains the mapping from textual identifiers to instances of the entity **1026**.

[0281] The depository **1560** is supplied by a generated class depository **1566**, which accepts instances of the promissary-reference **1528**, for later redemption. Redemption of promissary references is obtain upon invocation of a redeem member function. Resolution is requested for each deposited promissary reference.

[0282] Refer to FIG. 71. The host-writer **1418** visits the members **1038** of the instance of the host **1034** to determine client-member-data **1568** and client-member-functions **1570**, which are member data and functions, respectively, specified in module scope. The host-writer **1418** uses elements of the classes-writer **1394** to generate supporting member functions for the client-member-data **1568**. Additional module-member-data **1572** are generated from module predicate specifications. The module-member-data **1572** members generated for a host may include an predicator, a depository for promissary references, a resolver, a factory, a reflector, and an acceptor. The client-member-data **1568** are at the discretion of the developer. The module-member-data **1572** are, generated at the request of the developer, but the member characteristics are provided by the generator. The host-writer **1418** generates member-access **1574** elements, including member functions which provide access to the client-member-data **1568** and the module-member-data **1572**. The host-writer **1418** generates factory **1576** elements, including a constructor with initializers for member data, as necessary, and a destructor with deletion of member data.

5.1.9 Reflector Writer

[0283] The processor reflector-writer **1422** processes an instance of the module **1028** to generate a class reflector **1424** which provides run-time representations of genera and species relationships among classes. Such relationships are explicit at compile time, but at run time they are implicit and not immediately accessible to computations. Most computations do not require explicit access to these relationships but in some computational contexts they are very useful. The reflector-writer **1422** visits the instances of the classes **1030** for the supplied instance of the module **1028**, processing the species **1180** to construct an explicit representation of the genera and species relationships.

[0284] Refer to FIG. 72, which depicts the generated class reflector **1578**, a reflector **1424**, generated by the processor reflector-writer **1422**. The reflector **1578** provides various representations of species and genera relationships amongst the classes in a module. These relationships are presenting using textual identifiers for classes, since, at least in C++, classes do not have an explicit run-time representation. Among the elements generated for module classes are textual identifiers, which are available as static functions organized by class and as virtual member functions available from particular instances. These textual identifiers include the formal class identifier id **1106**, as well as optional additional tags specified by the developer.

[0285] The reflector-writer **1422** generates factory-services **1580**, including constructor and destructor elements. The generated class reflector **1578** provides id-services **1582**, including a mapping from identifiers to canonical identifiers. Identifiers include tags (elements of the tags **1206**) and formal class identifiers (the id **1106**). Canonical identifiers are always formal class identifiers. The reflector **1578** provides a validation which indicates whether a candidate identifier is recognized.

[0286] The generated class reflector **1578** provides set-services **1584** and sequence-services **1586** to represent genera and species relationships. The reflector **1578** provides immediate species and genera as well as the recursive closure of species and genera (i.e. children, parents, descendants, and ancestors). Set representations are useful for

efficient testing of membership of a first class amongst the species or genera of a second class. Sequence representations are useful for scanning, especially genera; the ordering of the sequence is from most specific to most generic, which is the typical order used, e.g. at compile-time, to resolve names in a class scope.

[0287] The generated class reflector **1578** provides an empty set, lacking any identifiers, and a universal set, including all the canonical identifiers for the classes in a module. The reflector **1578** provides the set of immediate species and the closure set of species for a class represented by an identifier. The closure set of species is the recursive closure of species; i.e. all specializations. The reflector **1578** provides the set of immediate genera and the closure set of genera for a class represented by an identifier. The closure set of genera is the recursive closure of genera; i.e. all generalizations.

[0288] The reflector-writer **1422** generates member-data **1588** which explicitly represents genera and species relationships. The generated class reflector **1578** provides an empty sequence, lacking any identifiers, and a universal sequence, including all the canonical identifiers for the classes in a module. The reflector **1578** provides the sequence of immediate species and the closure sequence of species for a class represented by an identifier. The reflector **1578** provides the sequence of immediate genera and the closure sequence of genera for a class represented by an identifier.

[0289] Refer to FIG. 73, which depicts an excerpt from the constructor of the reflector **1578**, generated by the reflector-writer **1422**. The generated constructor is an element of the factory-services **1580**; the member-data **1588** is initialized in the constructor. The reflector-writer **1422** visits the genera from most general to least general, ensuring that all of a class's genera have been visited before the class is visited. For each class, a genera set and sequence and a genera closure set and sequence are created. For each genus class, the genera set is augmented with the genus class. The genera closure set is augmented with the genera closure set of the genus class. The genera sequence and the genera closure sequence are augmented with the genus class. The genera closure sequence is augmented with the genera closure sequence of the genus class. The genera closure set is augmented with the genera set.

[0290] Refer to FIG. 74, which depicts an excerpt from the constructor of the reflector **1578**, generated by the reflector-writer **1422**. The reflector-writer **1422** visits the species from most specific to least specific, ensuring that all of a class's species are visited before the class is visited. For each class, a species set and sequence and a species closure set and sequence are created. For each species class, the species set is augmented with the species class. The species closure set is augmented with the species closure set of the species class. The species sequence and the species closure sequence are augmented with the species class. The species closure sequence is augmented with the species closure sequence of the species class.

5.1.10 Auditor Writer

[0291] The processor auditor-writer **1426** processes an instance of the module **1028** to generate a class auditor **1428** which provides verification of specified characteristics of an instantiation of a module. The developer may specify an audit processor for a module via the member datum auditor-

id **1144** of the class module **1028**. The developer may specify boolean requirements for a specified class via the member datum audit-requirements **1210** of the class class **1036**. The auditor-writer **1426** visits the supplied instance of the module **1028** and the instances of the classes **1030**.

[0292] Refer to FIG. 75, which depicts a class auditor **1590**, an auditor **1428**, generated by the auditor-writer **1426**. The auditor **1590** specializes the viewer **1592**, indicating that it views but does not edit the application-specific data structure. The auditor **1590** is initialized with a logger, which facilitates meaningful error messages. The developer may specify a logging-context **1594** via the member datum auditor-context **1214** of the class class **1036**.

[0293] The auditor-writer **1426** generates a collection views **1596**, each a member function specializing a view member function of the viewer **1592**. An element of the views **1596** is generated for each class with specified audit requirements. An exemplary member function of the views **1596** is shown for the class entity-**1026**. The generated member function creates a logging context, invokes the audit member function of the entity **1026** (generated by the classes-writer **1394**, see below), and, if the audit is successful, delegates the view to the default for the base class viewer **1592**, which in turn recursively dispatches views for the meron member data of the entity **1026**, if any.

[0294] The classes-writer **1394** generates a collection audits **1598**, each a member function corresponding to an instance of the class **1036**. An exemplary member function of the audits **1598** is also depicted. Each element of the audit-requirements **1210** generates a code segment, in which the requirement is evaluated, and, if the evaluation fails, a message is logged and failure is returned. If all the requirements are met, the audit succeeds.

5.2 Documentation Generators

[0295] Refer to FIG. 76. Elements of the document-generator **1014** variously process an instance of the module **1028** to produce catalog, description, figures, and vocabulary corresponding to the module instance. The document-generator **1014** includes a generator catalog-writer **1600**, which defines a comprehensive parts list (catalog) for the constituents of a module. The document-generator **1014** includes a generator description-writer **1602** which provides a textual description of the constituents of a module. The document-generator **1014** includes a generator figures-writer **1604**, which provides graphical depictions of the constituents of a module. The document-generator **1014** includes a generator vocabulary-writer **1606**, which provides a comprehensive listing of textual terms representing the constituents of a module.

5.2.1 Catalog Writer

[0296] The processor catalog-writer **1600** produces a catalog **1608** from the constituents of an instance of the module **1028**. The catalog-writer **1600** specializes the viewer **1592**. The catalog-writer **1600** processes an instance of the module **1028**. The catalog-writer **1600** visits classes and members, generating a part element for each visited instance. Each generated part element includes a textual identifier, a category (e.g., "class", "member-datum", etc), a term (suitable for use in the body of a document), and a handle (suitable for

use in the figures of a document). The collection of generated part elements provides a catalog.

5.2.2 Description Writer

[0297] The processor description-writer **1602** generates description **1610**, including textual descriptions of the constituents of a module. The description-writer **1602** specializes the viewer **1592**. The description-writer **1602** processes a supplied instance of the module **1028**. The description-writer **1602** visits classes and members. A summary description of the contained classes is generated. The summary description of each contained class includes the purpose **1112**, if any. A detailed description is also provided for each module, including a description of module-level generated classes, such as the host, viewer, editor, factory, etc.

[0298] The description-writer **1602** visits each instance of the class **1036**. For each class, an overview is generated which describes the purpose **1112** of the class (if any), the genera **1176** of the class (if any), the members of the class (if any), incorporating the purpose **1112** for each member, if any. The class overview also incorporates any remarks **1116** or notes **1118**. The overview also describes the species **1180** of the class (if any).

[0299] The description-writer **1602** visits each instance of the member **1046**. For each member datum, a paragraph is generated which describes the type of the member datum, the purpose **1112** of the member datum (if any), and any remarks **1116** or notes **1118**. Any specified acceptor for the member datum is also described. For each member function, a paragraph is generated which describes the return type of the member function, the arguments of the member function (if any), the purpose **1112** of the member function (if any), and any remarks **1116** or notes **1118**.

5.2.3 Figures Writer

[0300] The processor figures-writer **1604** generates FIGS. **1612**, including graphical depictions of the constituents of a module. The figures-writer **1604** specializes the viewer **1592**. The figures-writer **1604** processes a supplied instance of the module **1028**. The figures-writer **1604** visits classes and members. The figures-writer **1604** provides a figure which depicts the supplied module (using the synthetic language of the parser **1008**), including module predicates, module-scope members (i.e. host members), and root classes.

[0301] For each instance of the class **1036**, the figures-writer **1604** depicts class predicates, members of the class and species of the class.

[0302] For each instance of the member-datum **1052**, the figures-writer **1604** depicts the type, the scope handle, and predicates for the datum.

[0303] For each instance of the member-function **1048** the figures-writer **1604** depicts the return type, the scope handle, the argument list, and predicates for the member function.

5.2.4 Vocabulary Writer

[0304] The processor vocabulary-writer **1606** generates a vocabulary **1614**, including a comprehensive listing of textual terms representing the constituents of a module. The vocabulary-writer **1606** specializes the viewer **1592**. The vocabulary-writer **1606** visits each instance of the entity **1026**. For each entity, if the term **1108** is non-empty, a

vocabulary entry is generated which incorporates the term and a brief description incorporating the purpose **1112** of the entity.

I claim:

1. A computer-implemented method of processing a module specification to produce predicator definitions, comprising the steps of:

viewing a module, said module included in said module specification,

providing a predicator base class definition, said predicator base class definition included in said predicator definitions, and said predicator base class definition including a plurality of generic predicator apply operations,

providing a promissary reference base class definition, said promissary reference base class definition included in said predicate definitions, said promissary reference base class definition including a resolve operation, and said promissary reference base class definition including a plurality of generic promissary acceptor operations,

dispatching a plurality of categorical classes, said categorical classes included in said module;

viewing a categorical class, said categorical class included in said categorical classes,

accumulating a generic predicator apply operation corresponding to said categorical class to said generic predicator apply operations,

accumulating a generic promissary acceptor operation corresponding to said categorical class to said generic promissary acceptor operations,

providing a promissary dispatch in a categorical class definition corresponding to said categorical class, said dispatch in turn dispatching to said generic promissary acceptor operation,

dispatching a plurality of class members, said class members included in said categorical class; and

viewing a datum, said datum included in said class members,

dispatching a view to a datum type, said datum type associated with said datum,

receiving a value type,

providing a value predicator specialization corresponding to said value type for said datum, said value predicator specialization deriving from said predicator base class definition, and said value predicator specialization including a value specific predicator apply operation, corresponding to said generic predicator apply operation, and

accumulating said value predicator specialization to a plurality of predicator specializations, said predicator specializations included in said predicator definitions,

receiving a reference type,

testing for a meron qualification, said meron qualification included in said datum,

according to the success of said test for said meron qualification,

providing an instantiating predicator specialization, corresponding to said reference type for said datum, said instantiating predicator specialization deriving from said predicator base class definition, and said instantiating predica-

tor specialization including an instantiating specific predicator apply operation, corresponding to said generic predicator apply operation, and and accumulating said instantiating predicator specialization to said predicator specializations, according to the failure of said test for said meron qualification, providing a promissary predicator specialization, corresponding to said reference type for said datum, said promissary predicator specialization deriving from said predicator base class definition, said promissary predicator specialization including a promissary specific predicator apply operation, corresponding to said generic predicator apply operation,

accumulating said promissary predicator specialization to said predicator specializations, writing a promissary reference definition, said promissary reference definition deriving from said promissary reference base class definition, said promissary reference definition including a specific promissary acceptor operation, and said specific promissary acceptor operation corresponding to said generic promissary acceptor operation, and accumulating said promissary reference definition to a plurality of promissary reference definitions, said promissary reference definitions included in said predicator definitions.

* * * * *